



VERSION	V00	FIRST ISSUE	DATE	2008-09-27
---------	-----	-------------	------	------------

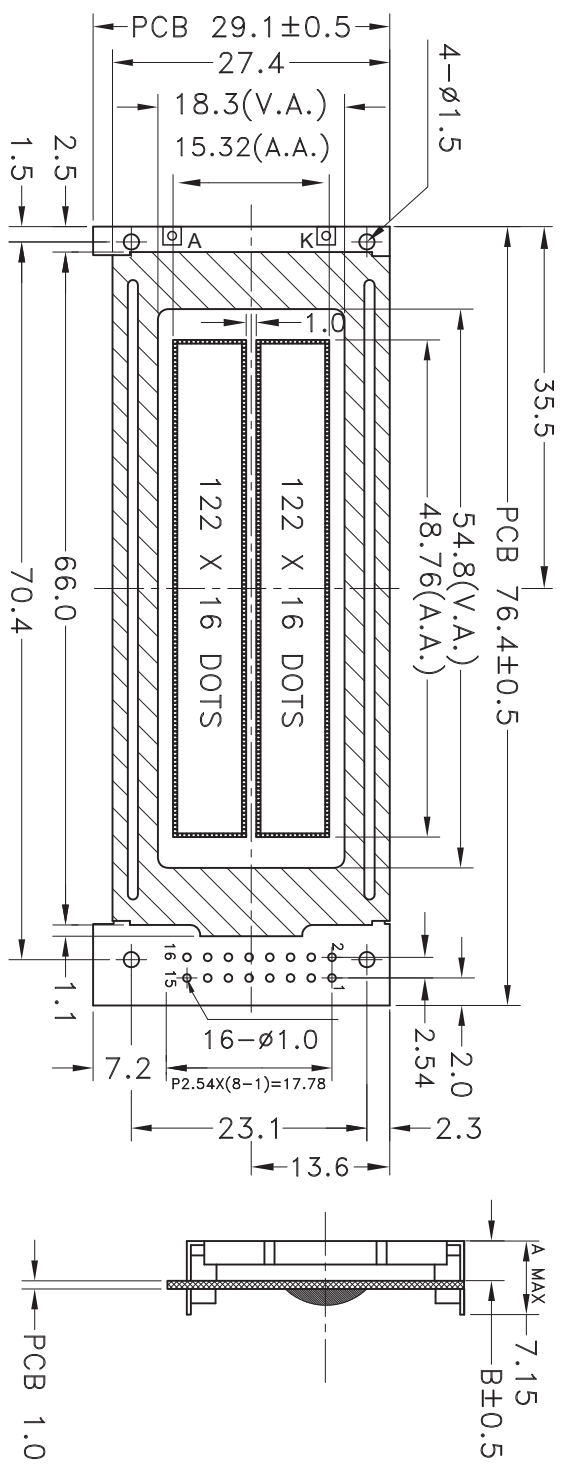

TYPE	A	B
LED B/L	7.15	5.05



DETAIL DOTS
SCALE: 10 : 1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	A	K
NAME	VDD	VSS	V0	/RES	E1	E2	R/W	A0	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSFLECTIVE/POSITIVE/-G
2. LCD DRIVING VOLTAGE: 5.0V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -1.0° C-60° C
6. STORAGE TEMP: -2.0° C-70° C
7. DRIVE MODE: 1/32 DUTY, 1/6 BIAS
8. BACKLIGHT: YELLOW/GREEN/SIDE BACKLIGHT/5.0V
9. CONTROL/DRIVE IC: AT15200A
10. OTHER:

NOTE:

DESCRIPTION:

SCALE: FIT
SHEET: 1 OF 1
UNIT: mm
PROJECTION

MODEL: JXD12232C2
SERIAL NUMBER: MLX0167

APP: DATE: CHK: DATE: DWN: DATE:

深圳佳显电子技术有限公司

C/D