





DG301




N=Number of contacts

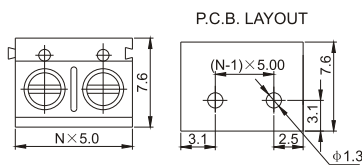


Pitch:5mm



DG301R

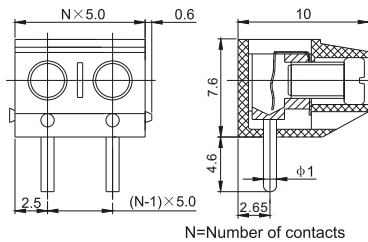


N=Number of contacts

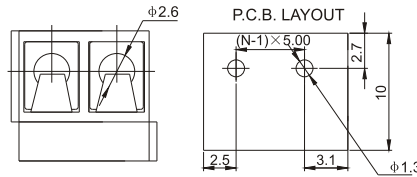


Pitch:5mm



DG306

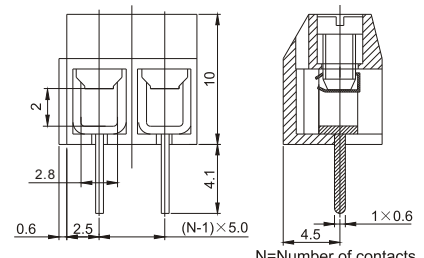

N=Number of contacts

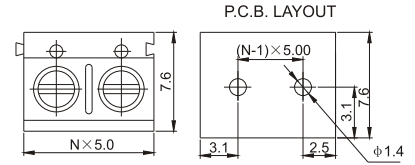

Pitch:5mm

- **材质及电镀**
 螺丝: M2.5, 钢, 镀锌
 簧片: 磷青铜, 镀镍或不锈钢
 焊针: 黄铜, 镀锡
 塑件: PBT, UL94V-0
- **电气性能**
 额定电压: 300V
 额定电流: 16A
 接触电阻: 20mΩ
 绝缘电阻: 5000MΩ/1000V
 耐电压: AC1500V/1Min
 使用线径: 22-14AWG 2.5mm²

- **机械性能**
 温度范围: -30°C~+120°C
 瞬时温度: +250°C 5秒
 扭矩: 0.4Nm(3.6lb.in)
 剥线长度: 4.5-5mm

- **Material**
 Screws: M2.5 steel Zinc plated
 Wire guard: Phosphor bronze Ni plated or stainless steel
 Pin header: Brass, Tin plated
 Housing: PBT, UL94V-0

- **Electrical**
 Rated voltage: 300V
 Rated current: 16A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: AC1500V/1Min
 Wire range: 22-14AWG 2.5mm²

- **Mechanical**
 Temp.Range: -30°C~+120°C
 MAX Soldering: +250°C, for 5 Sec.
 Torque: 0.4Nm(3.6lb.in)
 Strip length: 4.5-5mm

- **材质及电镀**
 螺丝: M2.5, 钢, 镀锌
 簧片: 磷青铜, 镀镍或不锈钢
 焊针: 黄铜, 镀锡
 塑件: PBT, UL94V-0
- **电气性能**
 额定电压: 300V
 额定电流: 16A
 接触电阻: 20mΩ
 绝缘电阻: 5000MΩ/1000V
 耐电压: AC1500V/1Min
 使用线径: 22-14AWG 2.5mm²

- **机械性能**
 温度范围: -30°C~+120°C
 瞬时温度: +250°C 5秒
 扭矩: 0.4Nm(3.6lb.in)
 剥线长度: 4.5-5mm

- **Material**
 Screws: M2.5 steel Zinc plated
 Wire guard: Phosphor bronze Ni plated or stainless steel
 Pin header: Brass, Tin plated
 Housing: PBT, UL94V-0

- **Electrical**
 Rated voltage: 300V
 Rated current: 16A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: AC1500V/1Min
 Wire range: 22-14AWG 2.5mm²

- **Mechanical**
 Temp.Range: -30°C~+120°C
 MAX Soldering: +250°C, for 5 Sec.
 Torque: 0.4Nm(3.6lb.in)
 Strip length: 4.5-5mm

- **材质及电镀**
 螺丝: M2.5, 钢, 镀锌
 簧片: 磷青铜, 镀镍或不锈钢
 焊针: 黄铜, 镀锡
 塑件: PBT, UL94V-0
- **电气性能**
 额定电压: 300V
 额定电流: 10A
 接触电阻: 20mΩ
 绝缘电阻: 5000MΩ/1000V
 耐电压: AC1500V/1Min
 使用线径: 22-14AWG 2.5mm²

- **机械性能**
 温度范围: -30°C~+120°C
 瞬时温度: +250°C 5秒
 扭矩: 0.4Nm(3.6lb.in)
 剥线长度: 4.5-5mm

- **Material**
 Screws: M2.5 steel Zinc plated
 Wire guard: Phosphor bronze Ni plated or stainless steel
 Pin header: Brass, Tin plated
 Housing: PBT, UL94V-0

- **Electrical**
 Rated voltage: 300V
 Rated current: 10A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: AC1500V/1Min
 Wire range: 22-14AWG 2.5mm²

- **Mechanical**
 Temp.Range: -30°C~+120°C
 MAX Soldering: +250°C, for 5 Sec.
 Torque: 0.4Nm(3.6lb.in)
 Strip length: 4.5-5mm