


Linear Low Noise Silicon Bipolar RF Transistor

- High linearity low noise driver amplifier
- Output compression point 19.5 dBm @ 1.8 GHz
- Ideal for oscillators up to 3.5 GHz
- Low noise figure 1.1 dB at 1.8 GHz
- Collector design supports 5 V supply voltage
- Pb-free (RoHS compliant) and halogen-free thin small flat package with visible leads
- Qualification report according to AEC-Q101 available







ESD (Electrostatic discharge) sensitive device, observe handling precaution!

Type	Marking	Pin Configuration			Package
BFR380F	FCs	1 = B	2 = E	3 = C	TSFP-3

Maximum Ratings at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	6	V
Collector-emitter voltage	V_{CES}	15	
Collector-base voltage	V_{CBO}	15	
Emitter-base voltage	V_{EBO}	2	
Collector current	I _C	80	mA
Base current	I _B	14	
Total power dissipation ¹⁾	P _{tot}	380	mW
<i>T</i> _S ≤ 95°C			
Junction temperature	T_{J}	150	°C
Storage temperature	T_{Stq}	-55 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ²⁾	R _{thJS}	145	K/W

1

 $^{{}^{1}}T_{\rm S}$ is measured on the collector lead at the soldering point to the pcb

 $^{^2}$ For the definition of R_{thJS} please refer to Application Note AN077 (Thermal Resistance Calculation)



Electrical Characteristics at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Values		Unit	
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage	V _{(BR)CEO}	6	9	-	V
$I_{\rm C}$ = 1 mA, $I_{\rm B}$ = 0					
Collector-emitter cutoff current	I _{CES}				nA
$V_{CE} = 5 \text{ V}, V_{BE} = 0$		-	1	30	
$V_{CE} = 15 \text{ V}, V_{BE} = 0$		-	-	1000	
Collector-base cutoff current	I _{CBO}	-	-	30	
$V_{\rm CB} = 5 \text{V}, I_{\rm E} = 0$					
Emitter-base cutoff current	I _{EBO}	-	1	500	
$V_{\rm EB}$ = 1 V, $I_{\rm C}$ = 0					
DC current gain	h _{FE}	90	120	160	-
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3 V, pulse measured					



Electrical Characteristics at T_A = 25 °C, unless otherwise specified

Electrical Characteristics at $T_A = 25$ °C, unless Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics (verified by random sampling	g)	1		1	
Transition frequency	f_{T}	11	14	-	GHz
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3 V, f = 1 GHz					
Collector-base capacitance	C _{cb}	-	0.5	0.7	pF
$V_{CB} = 5 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0$,					
emitter grounded					
Collector emitter capacitance	C _{ce}	-	0.2	-	
$V_{CE} = 5 \text{ V}, f = 1 \text{ MHz}, V_{BE} = 0$,					
base grounded					
Emitter-base capacitance	C _{eb}	-	1	-	
$V_{\text{EB}} = 0.5 \text{ V}, f = 1 \text{ MHz}, V_{\text{CB}} = 0$,					
collector grounded					
Minimum noise figure	NF _{min}				dB
$I_{\rm C}$ = 8 mA, $V_{\rm CE}$ = 3 V, $Z_{\rm S}$ = $Z_{\rm Sopt}$, f = 1.8 GHz		-	1.1	-	
$I_{\rm C}$ = 8 mA, $V_{\rm CE}$ = 3 V, $Z_{\rm S}$ = $Z_{\rm Sopt}$, f = 3 GHz		-	1.6	-	
Power gain, maximum available ¹⁾	G _{ma}				
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3 V, $Z_{\rm S}$ = $Z_{\rm Sopt}$,					
$Z_{L} = Z_{Lopt}$, $f = 1.8 \text{ GHz}$		_	13.5	-	
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3 V, $Z_{\rm S}$ = $Z_{\rm Sopt}$,					
$Z_{L} = Z_{Lopt}$, $f = 3 \text{ GHz}$		-	9.5	-	
Transducer gain	$ S_{21e} ^2$				dB
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3 V, $Z_{\rm S}$ = $Z_{\rm L}$ = 50 Ω ,					
f = 1.8 GHz		_	11	_	
f = 3 GHz		-	7	-	
Third order intercept point at output ²⁾	IP3	-	29	-	dBm
$V_{\rm CE}$ = 3 V, $I_{\rm C}$ = 40 mA, $Z_{\rm S}$ = $Z_{\rm L}$ =50 Ω , f = 1.8 GHz					
1dB compression point at output	P _{-1dB}				
$I_{\rm C}$ = 40 mA, $V_{\rm CE}$ = 3V, f = 1.8 GHz					
$Z_{\rm S} = Z_{\rm L} = 50 \Omega$		_	17	_	
$Z_{\rm S} = Z_{\rm Sopt}, \ Z_{\rm L} = Z_{\rm Lopt}$		_	19.5	_	

 $^{{}^{1}}G_{\text{ma}} = |S_{21e} / S_{12e}| (k-(k^{2}-1)^{1/2})$


²IP3 value depends on termination of all intermodulation frequency components.


Termination used for this measurement is 50Ω from 0.1 MHz to 6 GHz



Total power dissipation $P_{tot} = f(T_S)$


Permissible Pulse Load $R_{thJS} = f(t_p)$

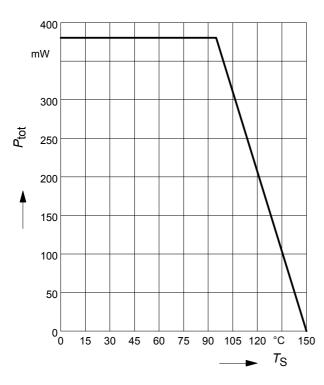

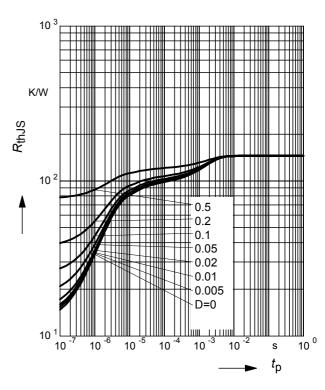


Permissible Pulse Load

 $P_{\text{totmax}}/P_{\text{totDC}} = f(t_{p})$

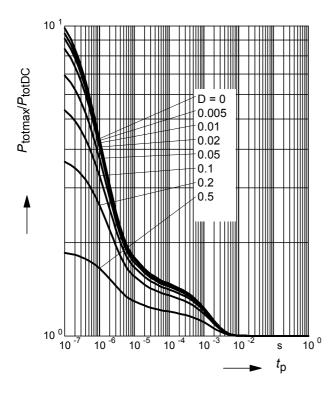

Collector-base capacitance C_{cb} = $f(V_{CB})$ f = 1MHz

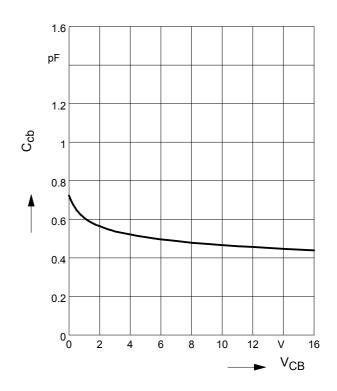




Third order Intercept Point $IP_3 = f(I_C)$

(Output, $Z_S = Z_L = 50\Omega$)


 V_{CE} = parameter, f = 1.8GHz

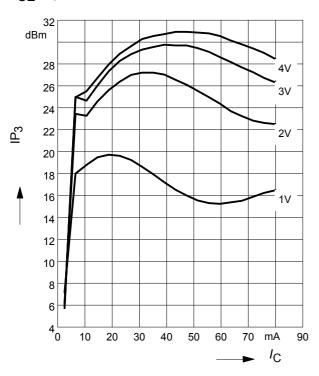

Transition frequency $f_T = f(I_C)$

f = 1 GHz


 V_{CE} = parameter

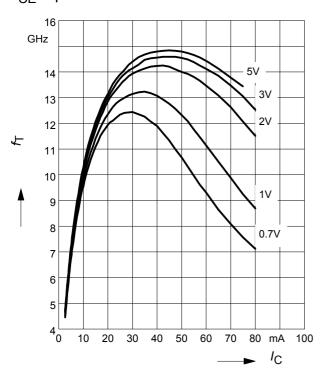

Third order Intercept Point $IP_3 = f(I_C)$

(Output, $Z_{\rm S}$ = $Z_{\rm L}$ = 50 Ω)


 V_{CE} = parameter, f = 900 MHz

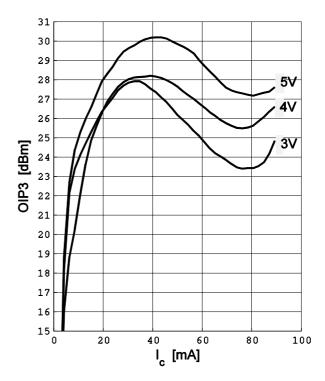

Power gain G_{ma} , $G_{ms} = f(I_C)$

f = 1.8 GHz


 V_{CE} = parameter

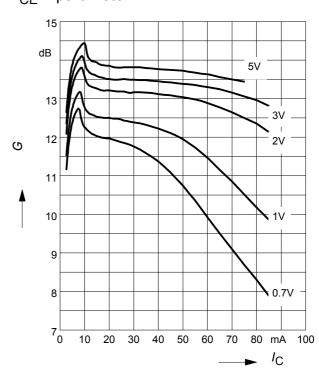




Power Gain G_{ma} , $G_{ms} = f(f)$

 V_{CE} = parameter

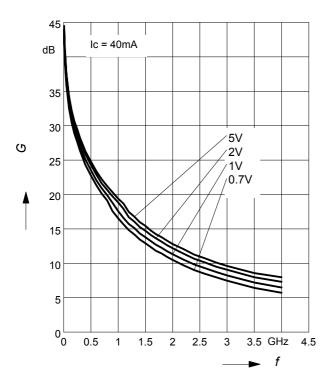


Power Gain G_{ma} , $G_{ms} = f(V_{CE})$: —— $|S_{21}|^2 = f(V_{CE})$: ——

f = parameter

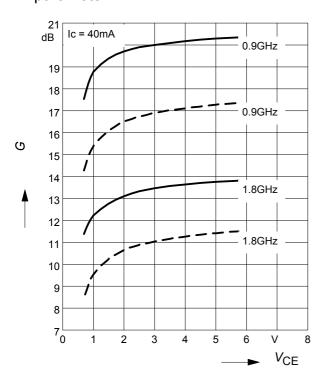

Power Gain $|S_{21}|^2 = f(f)$


 V_{CE} = parameter

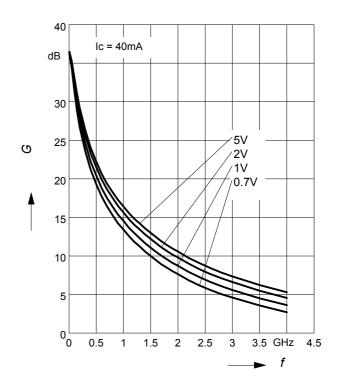

Power gain G_{ma} , $G_{ms} = f(I_C)$

 $V_{CE} = 3V$


f = parameter

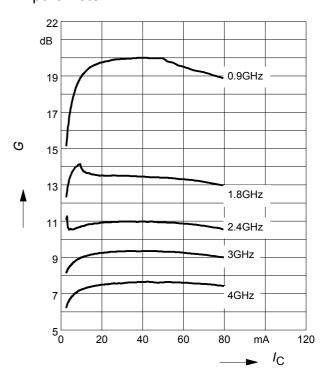




Minimum noise figure $NF_{min} = f(I_C)$

$$V_{CE}$$
 = 3V, Z_{S} = Z_{Sopt}

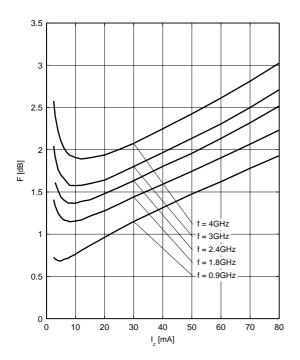


Minimum noise figure $NF_{min} = f(f)$

$$V_{CE}$$
 = 3V, Z_{S} = Z_{Sopt}

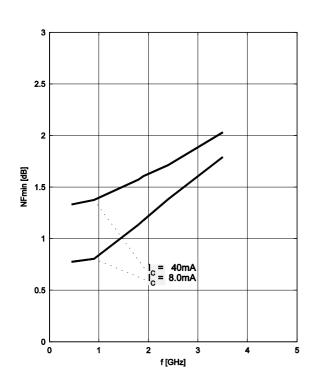

Noise figure $F = f(I_C)$


$$V_{CE} = 3V, f = 1.8 \text{ GHz}$$

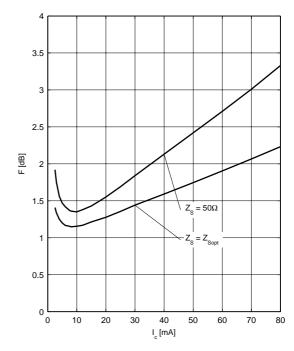

Source impedance for min.

noise figure vs. frequency

$$V_{\text{CE}}$$
 = 3 V, I_{C} = 8.0mA/40.0mA





SPICE GP Model

For the SPICE Gummel Poon (GP) model as well as for the S-parameters (including noise parameters) please refer to our internet website www.infineon.com/rf.models.


Please consult our website and download the latest versions before actually starting your design. You find the BFR380F SPICE GP model in the internet in MWO- and ADS-format, which you can import into these circuit simulation tools very quickly and conveniently. The model already contains the package parasitics and is ready to use for DC and high frequency simulations. The terminals of the model circuit correspond to the pin configuration of the device. The model parameters have been extracted and verified up to 10 GHz using typical devices. The BFR380F SPICE GP model reflects the typical DC- and RF-performance within the limitations which are given by the SPICE GP model itself. Besides the DC characteristics all S-parameters in magnitude and phase, as well as noise figure (including optimum source impedance, equivalent noise resistance and flicker noise) and intermodulation have been extracted.


8 2013-11-06




Package Outline








Foot Print




Marking Layout (Example)



Standard Packing

Reel Ø 180 mm = 3.000 Pieces/Reel Reel Ø 330 mm = 10.000 Pieces/Reel



9



Edition 2009-11-16

Published by Infineon Technologies AG 81726 Munich, Germany

© 2009 Infineon Technologies AG All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

BFR 380F H6327