



STD3PK50Z

P-channel 500 V, 3 Ω typ., 2.8 A Zener-protected SuperMESH™ Power MOSFET in a DPAK package

Datasheet — production data

Features

| Order code | V _{DSS} | R _{DS(on)} max | I _D | P _{TOT} |
|------------|------------------|-------------------------|----------------|------------------|
| STD3PK50Z | 500 V | < 4 Ω | 2.8 A | 70 W |

- Gate charge minimized
- Extremely high dv/dt capability
- 100% avalanche tested
- Very low intrinsic capacitance
- Improved ESD capability

Applications

- Switching applications

Description

This device is a P-channel Zener-protected Power MOSFET developed using STMicroelectronics' SuperMESH™ technology, achieved through optimization of ST's well established strip-based PowerMESH™ layout. In addition to a significant reduction in on-resistance, this device is designed to ensure a high level of dv/dt capability for the most demanding applications.

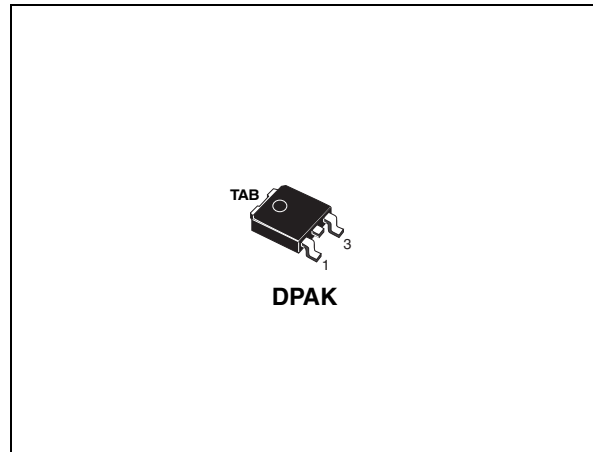


Figure 1. Internal schematic diagram

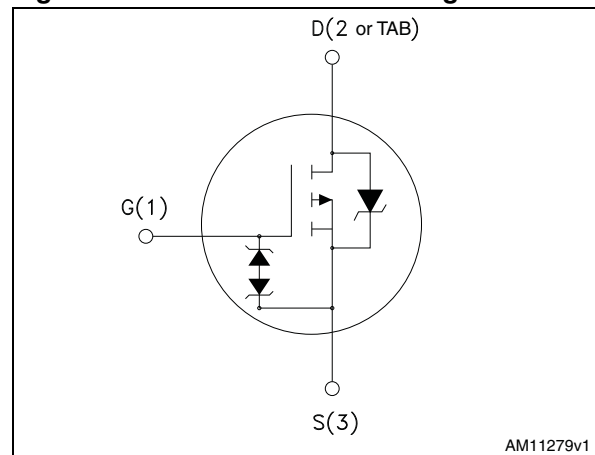


Table 1. Device summary

| Order code | Marking | Package | Packaging |
|------------|---------|---------|---------------|
| STD3PK50Z | 3PK50Z | DPAK | Tape and reel |

Note: For the P-channel Power MOSFETs actual polarity of voltages and current has to be reversed.

Contents

| | | |
|----------|---|-----------|
| 1 | Electrical ratings | 3 |
| 2 | Electrical characteristics | 4 |
| 2.1 | Electrical characteristics (curves) | 6 |
| 3 | Test circuits | 8 |
| 4 | Package mechanical data | 9 |
| 5 | Packaging mechanical data | 12 |
| 6 | Revision history | 14 |



1 Electrical ratings

Table 2. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|--------------------|--|-------------|------------------|
| V_{DS} | Drain source voltage | 500 | V |
| V_{GS} | Gate- source voltage | ± 30 | V |
| I_D | Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$ | 2.8 | A |
| I_D | Drain current (continuous) at $T_C = 100\text{ }^\circ\text{C}$ | 1.8 | A |
| $I_{DM}^{(1)}$ | Drain current (pulsed) | 11 | A |
| P_{TOT} | Total dissipation at $T_C = 25\text{ }^\circ\text{C}$ | 85 | W |
| I_{AR} | Max current during repetitive or single pulse avalanche (pulse width limited by T_{jmax}) | 2.8 | A |
| E_{AS} | Single pulse avalanche energy (starting $T_J = 25\text{ }^\circ\text{C}$, $I_D = I_{AS}$, $V_{DD} = 50\text{ V}$) | 200 | mJ |
| $dv/dt^{(2)}$ | Peak diode recovery voltage slope | 40 | V/ns |
| ESD | Gate-source human body model (R = 1,5 k, C = 100 pF) | 3 | kV |
| T_j T_{stg} | Operating junction temperature Storage temperature | - 55 to 150 | $^\circ\text{C}$ |

1. Pulse width limited by safe operating area.

2. $I_{SD} \leq 2.8\text{ A}$, $di/dt \leq 200\text{ A}/\mu\text{s}$, $V_{Peak} \leq V_{(BR)DSS}$

Table 3. Thermal data

| Symbol | Parameter | Value | Unit |
|-----------|--------------------------------------|-------|---------------------------|
| Rthj-case | Thermal resistance junction-case max | 1.47 | $^\circ\text{C}/\text{W}$ |
| Rthj-pcb | Thermal resistance junction-pcb max | 50 | $^\circ\text{C}/\text{W}$ |

Note: For the P-channel Power MOSFETs actual polarity of voltages and current has to be reversed.

2 Electrical characteristics

($T_{CASE} = 25\text{ °C}$ unless otherwise specified)

Table 4. On/off states

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------|--|--|------|------|----------|--------------------------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage | $I_D = 1\text{ mA}, V_{GS} = 0$ | 500 | | | V |
| I_{DSS} | Zero gate voltage drain current ($V_{GS} = 0$) | $V_{DS} = 500\text{ V},$ $V_{DS} = 500\text{ V}, T_C = 125\text{ °C}$ | | | 1 100 | μA μA |
| I_{GSS} | Gate body leakage current ($V_{DS} = 0$) | $V_{GS} = \pm 25\text{ V}$ | | | ± 10 | μA |
| $V_{GS(th)}$ | Gate threshold voltage | $V_{DS} = V_{GS}, I_D = 100\text{ }\mu\text{A}$ | 3 | 3.75 | 4.5 | V |
| $R_{DS(on)}$ | Static drain-source on-resistance | $V_{GS} = 10\text{ V}, I_D = 1.4\text{ A}$ | | 3 | 4 | Ω |

Table 5. Dynamic

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-------------------|---------------------------------------|---|------|------|------|----------|
| C_{iss} | Input capacitance | $V_{DS} = 50\text{ V}, f = 1\text{ MHz}, V_{GS} = 0$ | | 530 | | pF |
| C_{oss} | Output capacitance | | - | 50 | - | pF |
| C_{rss} | Reverse transfer capacitance | | | | 25 | |
| $C_{o(tr)}^{(1)}$ | Equivalent capacitance time related | $V_{GS} = 0, V_{DS} = 0\text{ to }400\text{ V}$ | - | 32 | - | pF |
| $C_{o(er)}^{(2)}$ | Equivalent capacitance energy related | | - | 23 | - | pF |
| R_G | Intrinsic gate resistance | $f = 1\text{ MHz open drain}$ | - | 4.7 | - | Ω |
| Q_g | Total gate charge | $V_{DD} = 400\text{ V}, I_D = 2.8\text{ A}$ $V_{GS} = 10\text{ V}$ (see Figure 14) | | 29 | | nC |
| Q_{gs} | Gate-source charge | | - | 4.3 | - | nC |
| Q_{gd} | Gate-drain charge | | | | 15 | |

1. Time related is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}
2. energy related is defined as a constant equivalent capacitance giving the same stored energy as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}

Note: For the P-channel Power MOSFETs actual polarity of voltages and current has to be reversed.

Table 6. Switching times

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------|--|------|------|------|------|
| $t_{d(on)}$ | Turn-on delay time | $V_{DD} = 250\text{ V}$, $I_D = 1.4\text{ A}$, $R_G = 4.7\ \Omega$, $V_{GS} = 10\text{ V}$ (see Figure 13) | | 16 | | ns |
| t_r | Rise time | | | 15 | | ns |
| $t_{d(off)}$ | Turn-off delay time | | | 46 | - | ns |
| t_f | Fall time | | | 26 | | ns |

Table 7. Source drain diode

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|----------------|-------------------------------|---|------|------|------|------|
| I_{SD} | Source-drain current | | - | | 2.8 | mA |
| I_{SDM} | Source-drain current (pulsed) | | | | 11.2 | A |
| $V_{SD}^{(1)}$ | Forward on voltage | $I_{SD} = 2.8\text{ A}$, $V_{GS} = 0$ | - | | 1.5 | V |
| t_{rr} | Reverse recovery time | $I_{SD} = 2.8\text{ A}$, $V_{DD} = 60\text{ V}$ $di/dt = 100\text{ A}/\mu\text{s}$, (see Figure 15) | - | 220 | | ns |
| Q_{rr} | Reverse recovery charge | | | 1600 | | nC |
| I_{RRM} | Reverse recovery current | | | 14 | | A |
| t_{rr} | Reverse recovery time | $I_{SD} = 2.8\text{ A}$, $V_{DD} = 60\text{ V}$ $di/dt = 100\text{ A}/\mu\text{s}$, $T_J = 150\text{ }^\circ\text{C}$ (see Figure 15) | - | 280 | | ns |
| Q_{rr} | Reverse recovery charge | | | 2100 | | nC |
| I_{RRM} | Reverse recovery current | | | 15 | | A |

1. Pulsed: pulse duration = 300 μs , duty cycle 1.5%

Table 8. Gate-source Zener diode

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|------------|-------------------------------|---|------|------|------|------|
| BV_{GSO} | Gate-source breakdown voltage | $I_{gs} \pm 1\text{ mA}$, (open drain) | 30 | - | | V |

The built-in back- to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

Note: For the P-channel Power MOSFETs actual polarity of voltages and current has to be reversed.

2.1 Electrical characteristics (curves)

Figure 2. Safe operating area

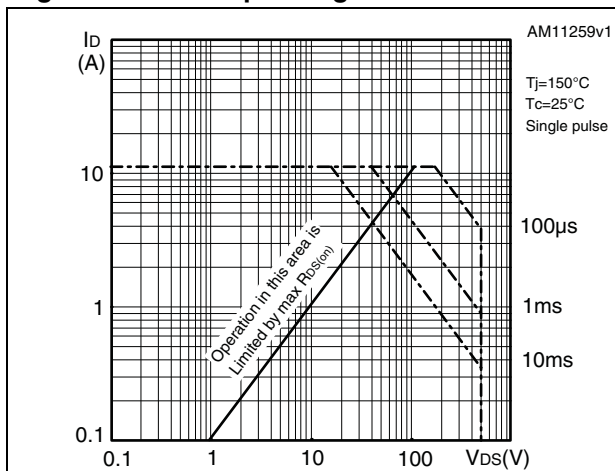


Figure 3. Thermal impedance

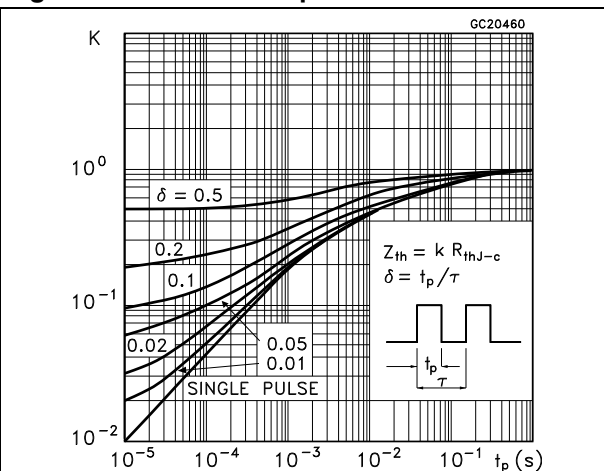


Figure 4. Output characteristics

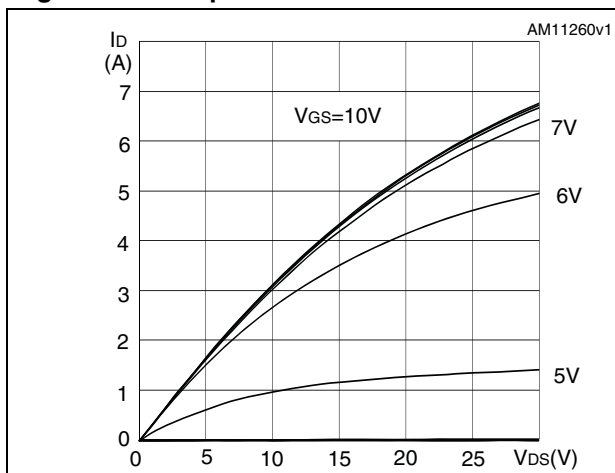


Figure 5. Transfer characteristics

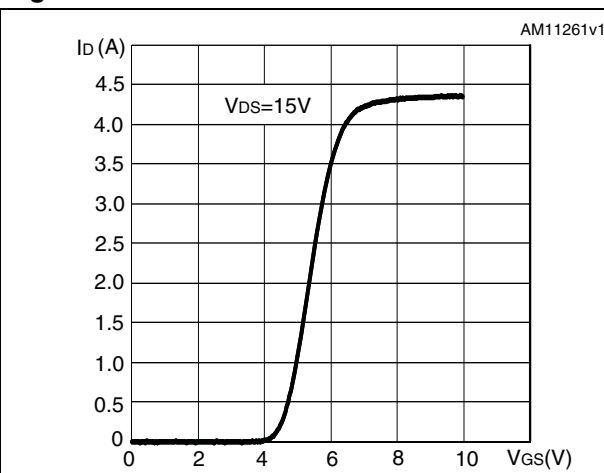


Figure 6. Normalized $B_{V_{DSS}}$ vs temperature

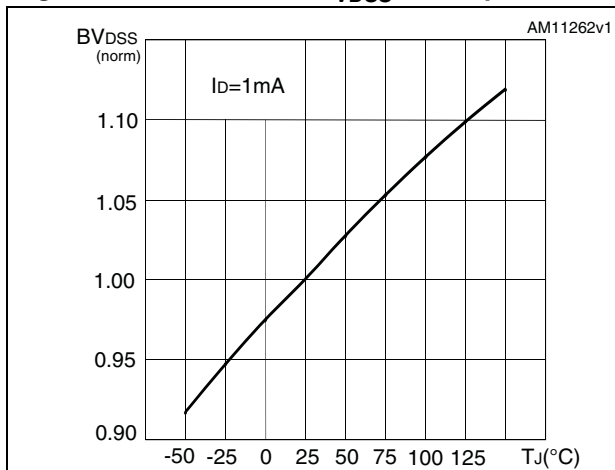


Figure 7. Static drain-source on-resistance

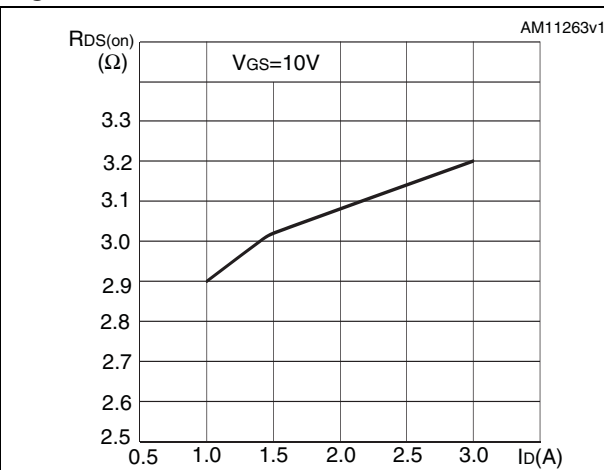


Figure 8. Gate charge vs gate-source voltage Figure 9. Capacitance variations

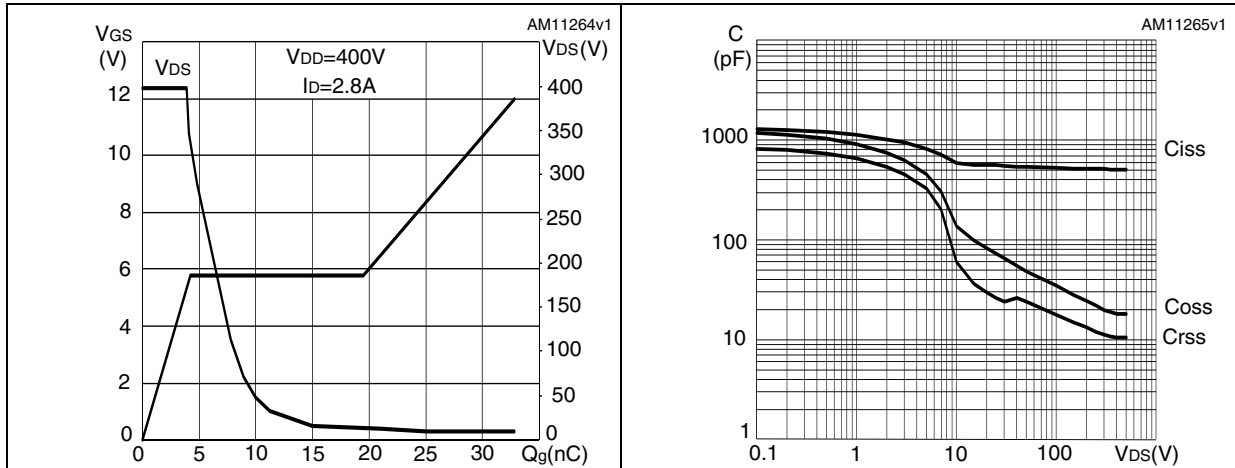


Figure 10. Normalized gate threshold voltage vs temperature Figure 11. Normalized on-resistance vs temperature


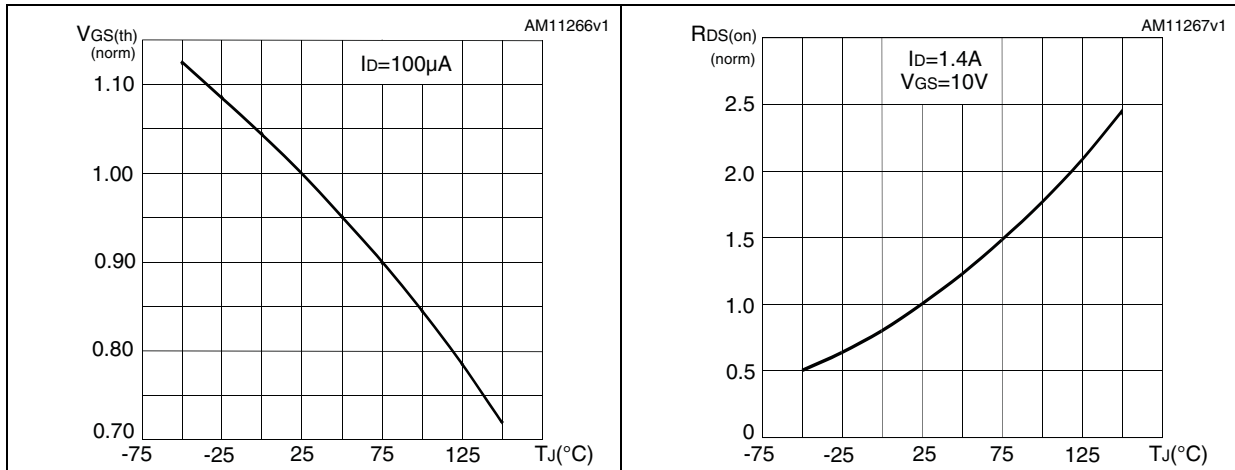


Figure 12. Maximum avalanche energy vs starting T_j

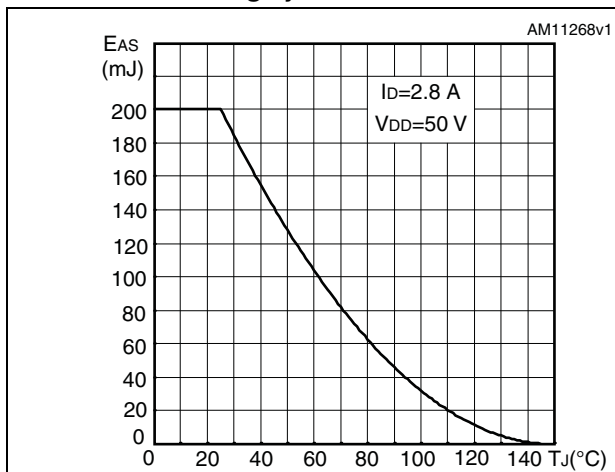

3 Test circuits

Figure 13. Switching times test circuit for resistive load

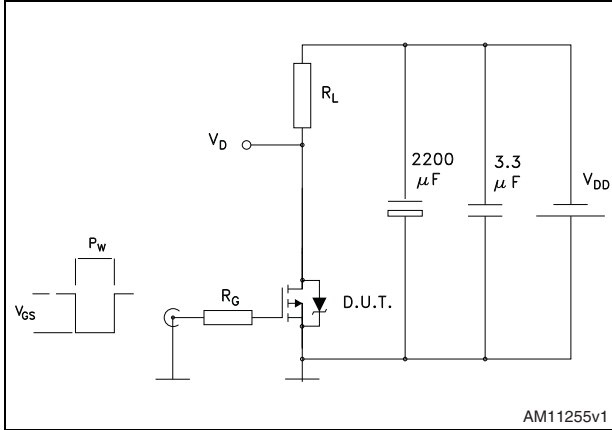


Figure 14. Gate charge test circuit


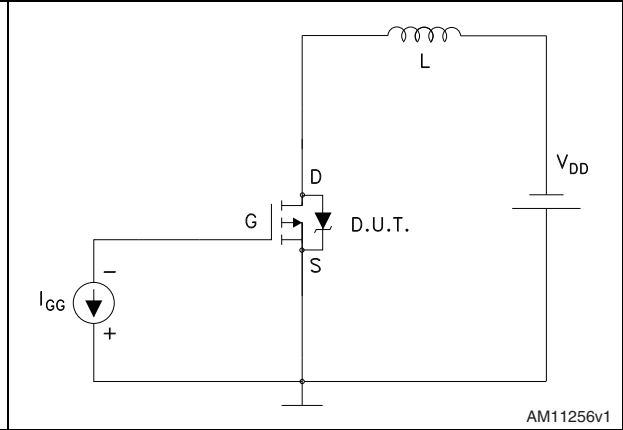


Figure 15. Test circuit for diode recovery behavior

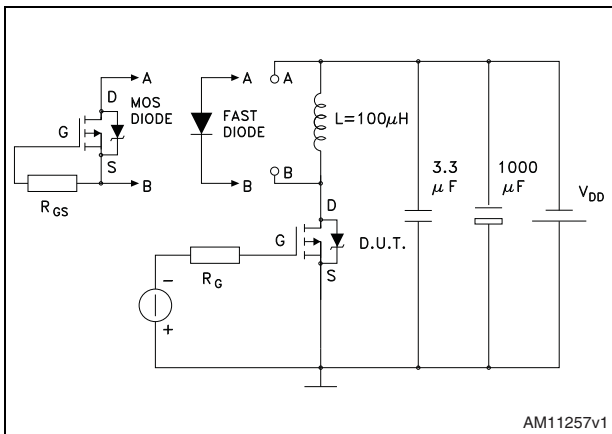

4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Table 9. DPAK (TO-252) mechanical data

| Dim. | mm | | |
|------|------|------|-------|
| | Min. | Typ. | Max. |
| A | 2.20 | | 2.40 |
| A1 | 0.90 | | 1.10 |
| A2 | 0.03 | | 0.23 |
| b | 0.64 | | 0.90 |
| b4 | 5.20 | | 5.40 |
| c | 0.45 | | 0.60 |
| c2 | 0.48 | | 0.60 |
| D | 6.00 | | 6.20 |
| D1 | | 5.10 | |
| E | 6.40 | | 6.60 |
| E1 | | 4.70 | |
| e | | 2.28 | |
| e1 | 4.40 | | 4.60 |
| H | 9.35 | | 10.10 |
| L | 1 | | 1.50 |
| L1 | | 2.80 | |
| L2 | | 0.80 | |
| L4 | 0.60 | | 1 |
| R | | 0.20 | |
| V2 | 0° | | 8° |

Figure 16. DPAK (TO-252) drawing


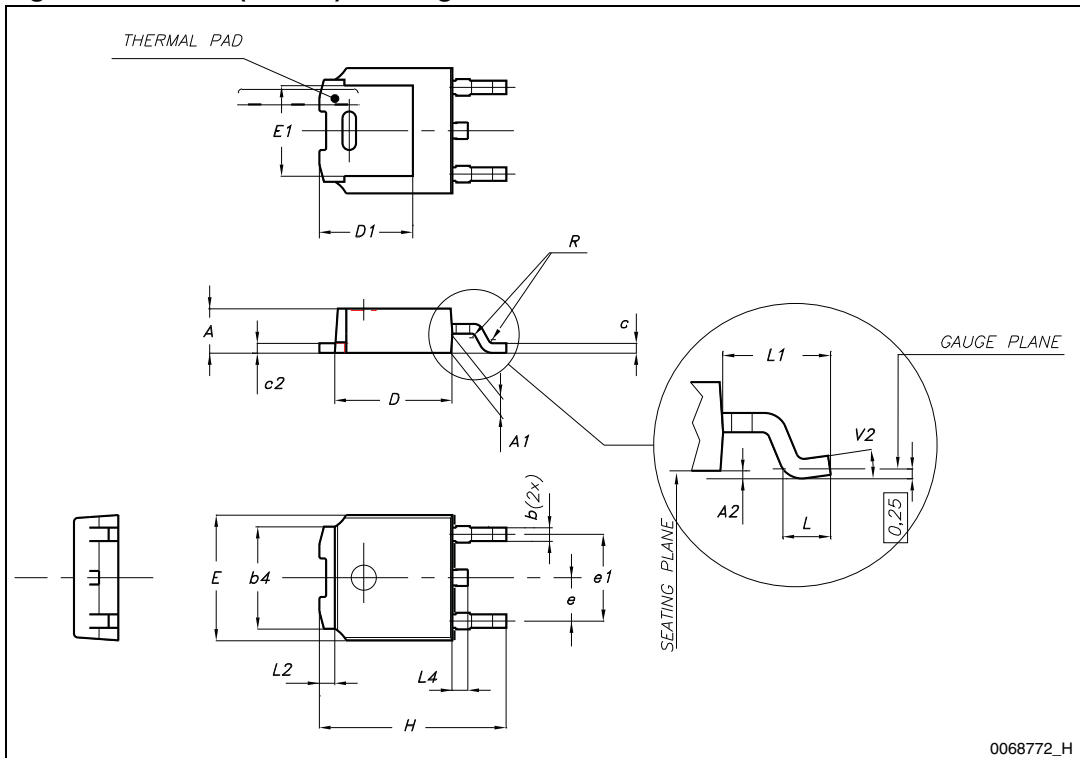


Figure 17. DPAK footprint^(a)

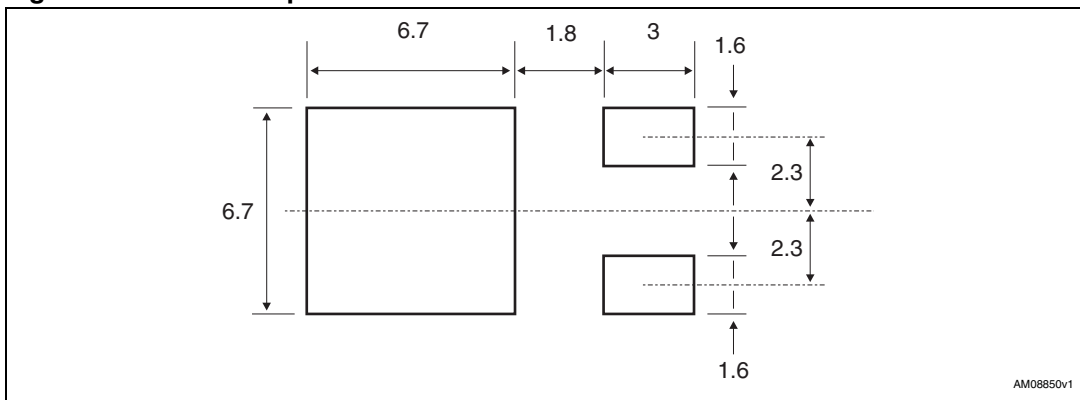

a. All dimensions are in millimeters

5 Packaging mechanical data

Table 10. DPAK (TO-252) tape and reel mechanical data

| Tape | | | Reel | | |
|------|------|------|-----------|------|------|
| Dim. | mm | | Dim. | mm | |
| | Min. | Max. | | Min. | Max. |
| A0 | 6.8 | 7 | A | | 330 |
| B0 | 10.4 | 10.6 | B | 1.5 | |
| B1 | | 12.1 | C | 12.8 | 13.2 |
| D | 1.5 | 1.6 | D | 20.2 | |
| D1 | 1.5 | | G | 16.4 | 18.4 |
| E | 1.65 | 1.85 | N | 50 | |
| F | 7.4 | 7.6 | T | | 22.4 |
| K0 | 2.55 | 2.75 | | | |
| P0 | 3.9 | 4.1 | Base qty. | | 2500 |
| P1 | 7.9 | 8.1 | Bulk qty. | | 2500 |
| P2 | 1.9 | 2.1 | | | |
| R | 40 | | | | |
| T | 0.25 | 0.35 | | | |
| W | 15.7 | 16.3 | | | |

Figure 18. Tape for DPAK (TO-252)


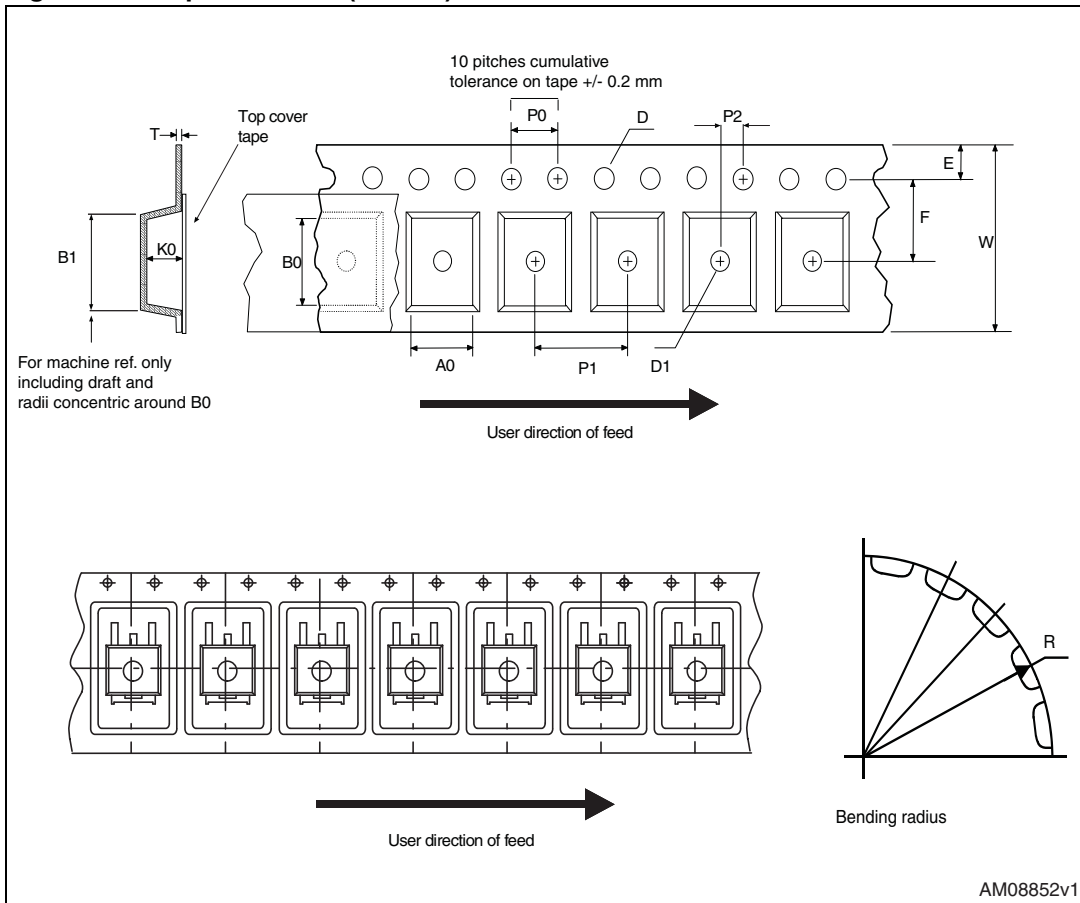


Figure 19. Reel for DPAK (TO-252)

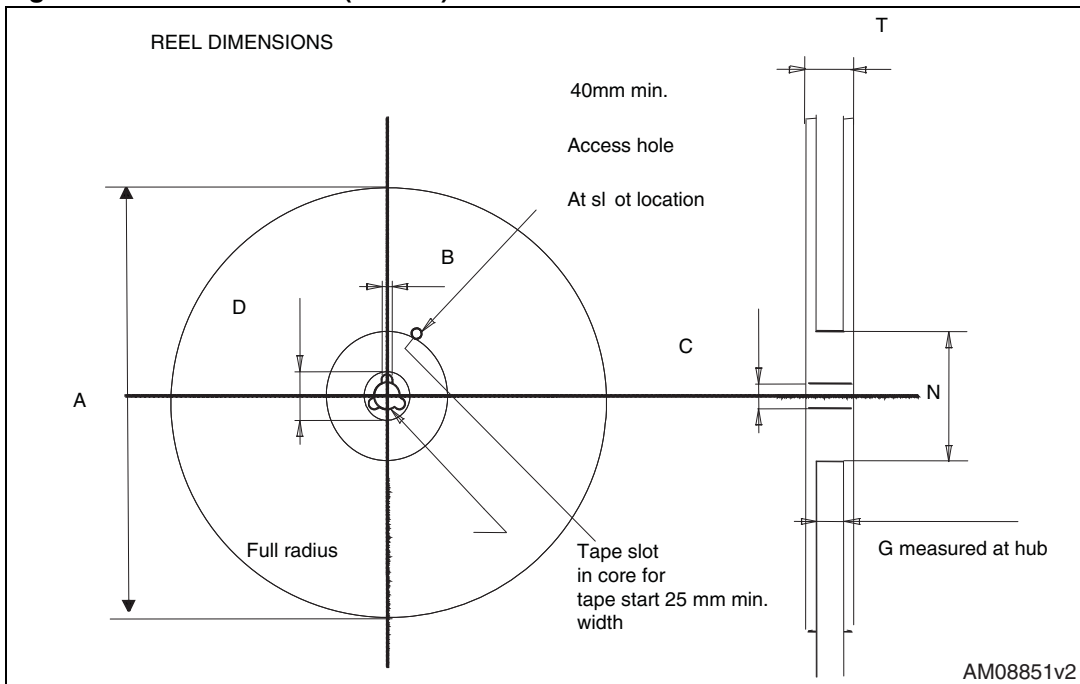

6 Revision history

Table 11. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 26-Nov-2010 | 1 | First release. |
| 31-Aug-2012 | 2 | Document status promoted from preliminary data to production data. Minor text changes on the cover page. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STD3PK50Z](#)