


## Automotive high voltage power Schottky rectifier

Datasheet - production data

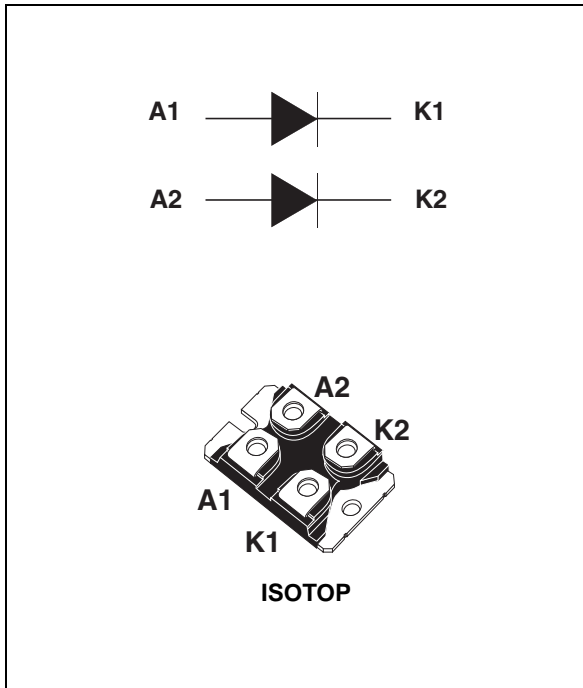

### Description

This high voltage Schottky rectifier is suitable for high frequency switch mode power supplies.

Packaged in ISOTOP, this device is intended for use in secondary rectification applications.

**Table 1. Device summary**

$I_{F(AV)}$	2 x 100 A
$V_{RRM}$	170 V
$T_j$	150 °C
$V_F$ (typ)	0.63 V

### Features

- Negligible switching losses
- Avalanche rated
- Low leakage current
- Good trade-off between leakage current and forward voltage drop
- Insulated package:
  - Electrical insulation = 2500 V rms,
  - Capacitance = 45 pF
- AEC-Q101 qualified
- ECOPACK<sup>®</sup>2 compliant component

# 1 Characteristics

**Table 2. Absolute ratings - limiting values per diode at  $T_{amb} = 25\text{ °C}$ , unless otherwise specified**

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage	170	V
$I_{F(RMS)}$	Forward rms current	200	A
$I_{F(AV)}$	Average forward current, $\delta = 0.5$	$T_c = 105\text{ °C}$ per diode	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10\text{ ms}$ sinusoidal	A
$P_{ARM}$	Repetitive peak avalanche power	$t_p = 1\text{ }\mu\text{s}$ , $T_j = 25\text{ °C}$	W
$T_{stg}$	Storage temperature range	-55 to + 150	°C
$T_j$	Maximum operating junction temperature <sup>(1)</sup>	150	°C

1.  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  condition to avoid thermal runaway for a diode on its own heatsink

**Table 3. Thermal parameters**

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case	Per diode	0.52
		Total	0.31
$R_{th(c)}$	Coupling thermal resistance	0.1	°C/W

When the diodes are used simultaneously:

$$T_{j(\text{diode}1)} = P_{(\text{diode}1)} \times R_{th(j-c)} \text{ (per diode)} + P_{(\text{diode}2)} \times R_{th(c)}$$

**Table 4. Static electrical characteristics**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	-	-	200	$\mu\text{A}$
		$T_j = 125\text{ °C}$	-	30	100	mA
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	-	-	0.85	V
		$T_j = 150\text{ °C}$	-	0.63	0.68	
		$T_j = 25\text{ °C}$	-	-	1.01	
		$T_j = 150\text{ °C}$	-	0.78	0.86	

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$   
 2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 0.5 \times I_{F(AV)} + 0.0018 I_{F(RMS)}^2$$

Figure 1. Conduction losses versus average current (per diode)

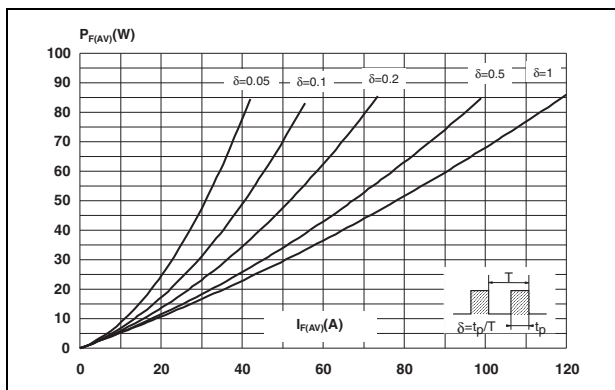


Figure 2. Average forward current versus ambient temperature ( $\delta = 0.5$ , per diode)

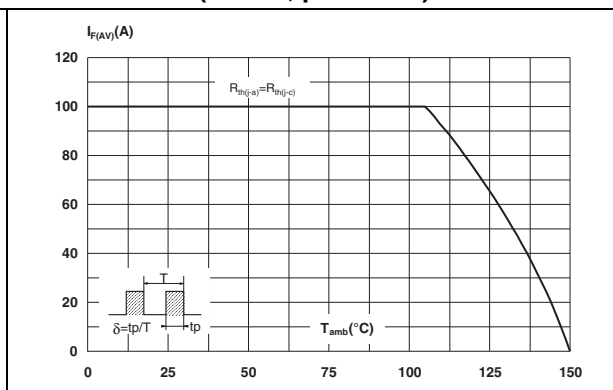


Figure 3. Non-repetitive surge peak forward current versus overload duration (maximum values per diode)

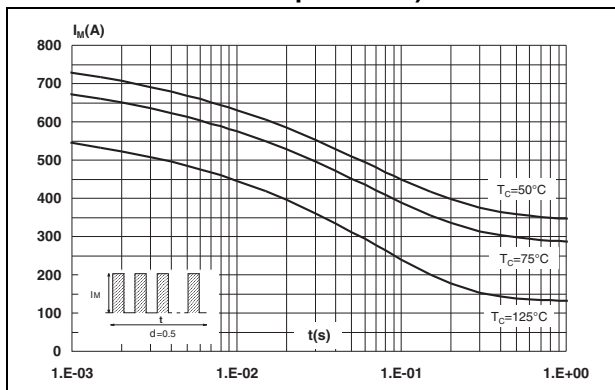


Figure 4. Relative variation of thermal impedance (junction to case) versus pulse duration

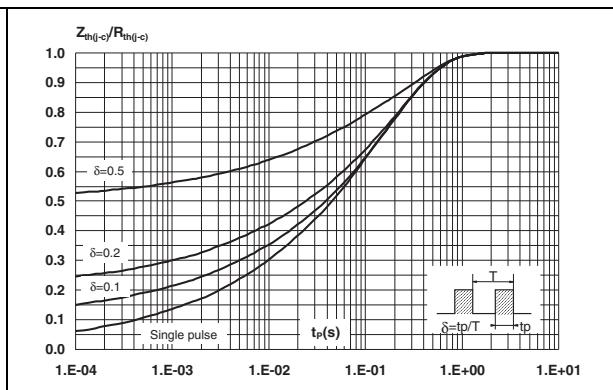


Figure 5. Reverse leakage current versus reverse voltage applied (typical values per diode)



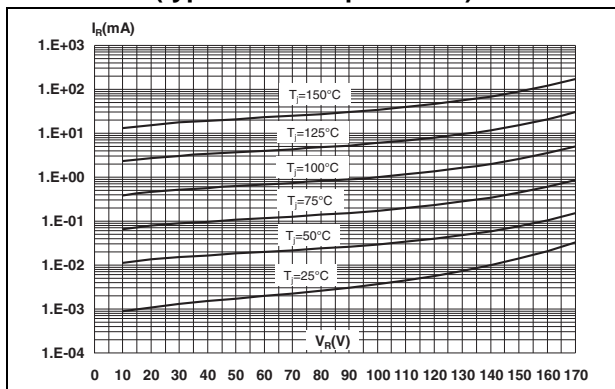



Figure 6. Junction capacitances versus reverse voltage applied (typical values per diode)

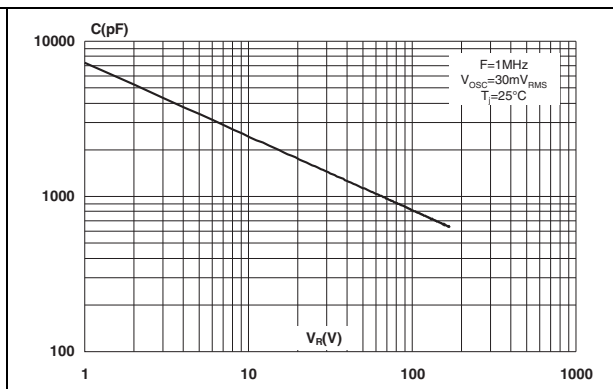


**Figure 7. Forward voltage drop versus forward current (per diode, low level)**

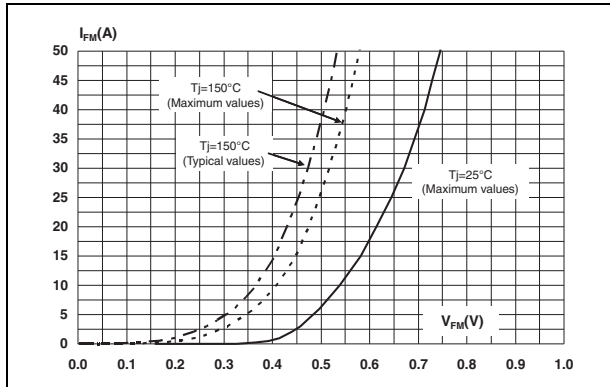


**Figure 8. Forward voltage drop versus forward current (per diode, high level)**

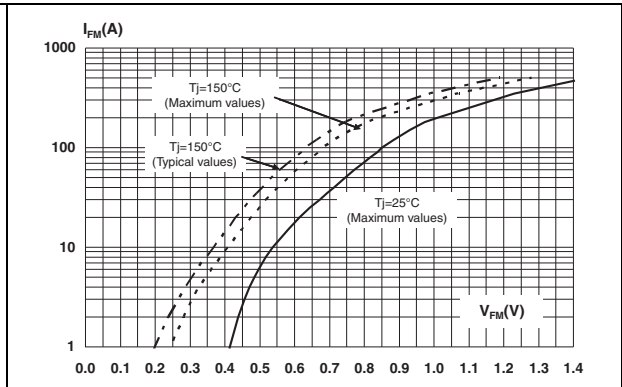

**Figure 9. Normalized avalanche power derating versus pulse duration**

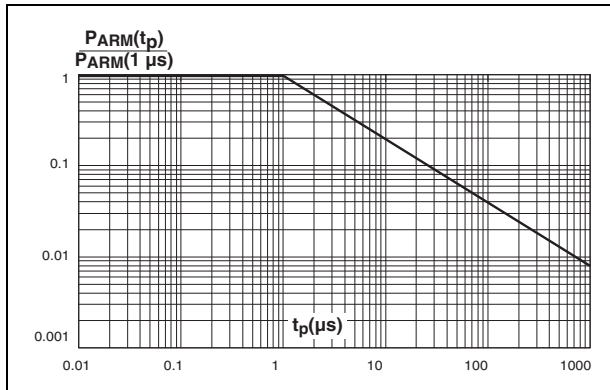

**Figure 10. Normalized avalanche power derating versus junction temperature**

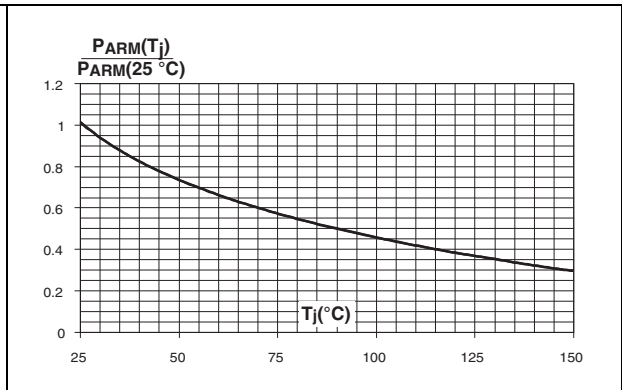

## 2 Package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 1.3 N·m
- Maximum torque value: 1.5 N·m
- Mandatory. Do not use any screws other than the screws soled with the package for connecting the 4 nuts in the front of the ISOTOP package.

STMicroelectronics strongly recommend the use of the screws delivered with this product. The use of anyother screws is entirely at the user’s own risk and will invalidate the warranty.

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

**Table 5. ISOTOP package dimensions**

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	11.80	12.20	0.465	0.480
A1	8.90	9.10	0.350	0.358
B	7.8	8.20	0.307	0.323
C	0.75	0.85	0.030	0.033
C2	1.95	2.05	0.077	0.081
D	37.80	38.20	1.488	1.504
D1	31.50	31.70	1.240	1.248
E	25.15	25.50	0.990	1.004
E1	23.85	24.15	0.939	0.951
E2	24.80 typ.		0.976 typ.	
G	14.90	15.10	0.587	0.594
G1	12.60	12.80	0.496	0.504
G2	3.50	4.30	0.138	0.169
F	4.10	4.30	0.161	0.169
F1	4.60	5.00	0.181	0.197
P	4.00	4.30	0.157	0.69
P1	4.00	4.40	0.157	0.173
S	30.10	30.30	1.185	1.193

### 3 Ordering information

**Table 6. Ordering information**

Order code	Marking	Package	Weight	Base qty <sup>(1)</sup>	Delivery mode
STPS200170TV1Y	STPS200170TV1Y	ISOTOP	27 g without screws	10 with screws	Tube

1. This product is supplied with 40 terminal screws and washers for each tube. The screws and washers are supplied in a separate pack with the order.

### 4 Revision history

**Table 7. Document revision history**

Date	Revision	Changes
02-Mar-2010	1	First issue.
07-Oct-2011	2	Added torque values in Section 2.
12-Nov-2015	3	Updated features in cover page. Text added in <a href="#">Section 2</a> .

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STPS200170TV1Y](#)