




H 31S,32S CCC CQC VDE UL cUL SF

玻璃保险丝管(慢断型) GLASS TUBE MICROFUSE (SLOW-BLOW)

31S/32S RoHS I-T CHARACTERISTICS CURVE
31S/32S RoHS 电流-时间曲线图

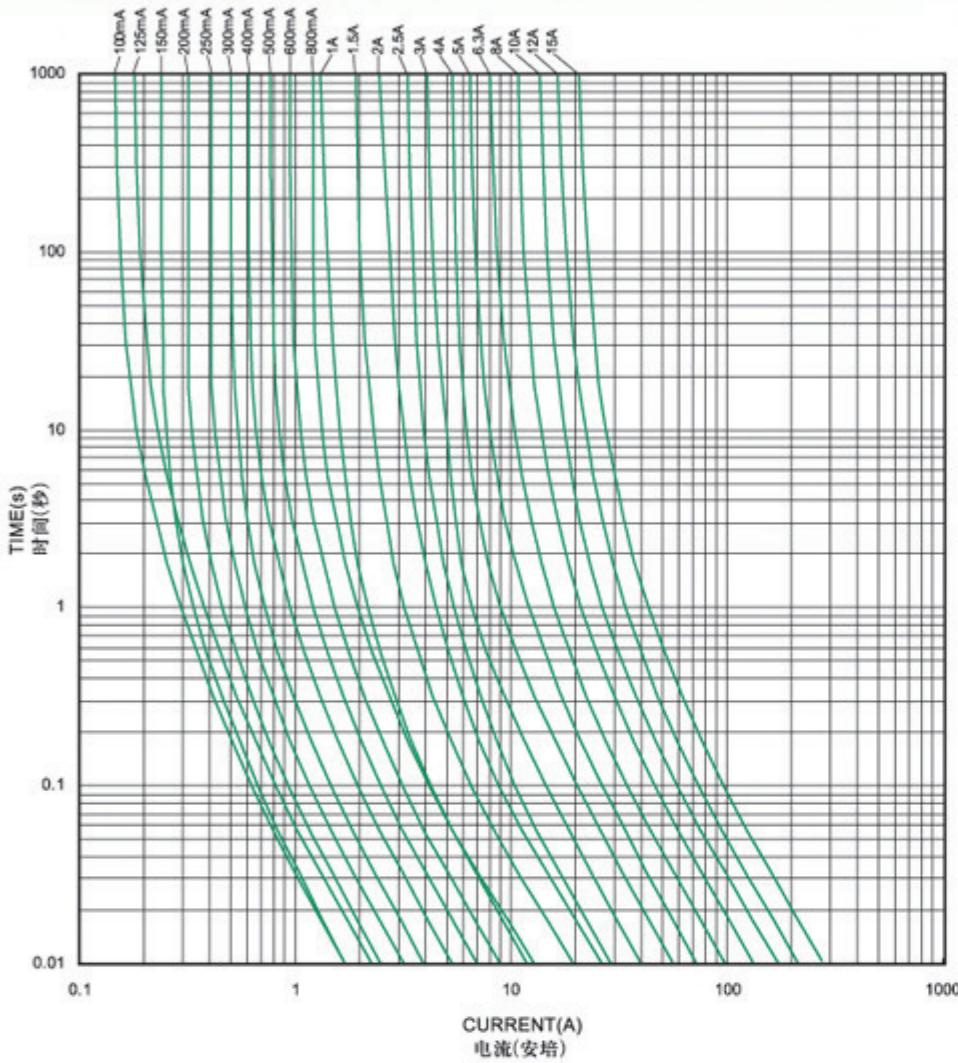

目录编号 CATALOG NO.	额定电流 CURRENT RATING	安全认证 SAFETY APPROVALS						i ² T 参考值 REFERENCE (A ² .Sec.) (RoHS)
		CCC 32S	CQC 32S	VDE 32S	UL(CUL)		CSA	
		H	H	H	H	L	H	
31S,32S-0100H/L	100mA	●						0.0294
31S,32S-0125H/L	125mA				●	●	●	0.0521
31S,32S-0150H/L	150mA				●	●	●	0.0288
31S,32S-0160H/L	160mA				●	●	●	0.0327
31S,32S-0200H/L	200mA	●			●	●	●	0.0625
31S,32S-0250H/L	250mA	●		●	●	●	●	0.100
31S,32S-0300H/L	300mA				●	●	●	0.156
31S,32S-0315H/L	315mA	●		●	●	●	●	0.160
31S,32S-0350H/L	350mA				●	●	●	0.175
31S,32S-0375H/L	375mA				●	●	●	0.179
31S,32S-0400H/L	400mA				●	●	●	0.281
31S,32S-0500H/L	500mA	●		●	●	●	●	0.485
31S,32S-0600H/L	600mA				●	●	●	0.809
31S,32S-0630H/L	630mA	●			●	●	●	0.831
31S,32S-0750H/L	750mA				●	●	●	0.943
31S,32S-0800H/L	800mA	●			●	●	●	1.667
31S,32S-010H/L	1A	●		●	●	●	●	1.413
31S,32S-012H/L	1.2A				●	●	●	3.151
31S,32S-013H/L	1.25A	●			●	●	●	3.356
31S,32S-015H/L	1.5A				●	●	●	3.767
31S,32S-016H/L	1.6A	●		●	●	●	●	5.870
31S,32S-020H/L	2A	●		●	●	●	●	6.950
31S,32S-023H/L	2.25A				●	●	●	7.410
31S,32S-025H/L	2.5A	●		●	●	●	●	8.551
31S,32S-030H/L	3A				●	●	●	15.52
31S,32S-032H/L	3.15A	●			●	●	●	28.09
31S,32S-035H/L	3.5A				●	●	●	29.45
31S,32S-040H/L	4A	●			●	●	●	31.36
31S,32S-050H/L	5A		●	●	●	●	●	53.29
31S,32S-060H/L	6A				●	●	●	86.25
31S,32S-063H/L	6.3A		●		●	●	●	95.09
31S,32S-070H/L	7A				●	●	●	120.8
31S,32S-080H/L	8A				●	●	●	175.4
31S,32S-090H/L	9A				●	●	●	228.6
31S,32S-100H/L	10A				●	●	●	297.8
31S,32S-120H/L	12A					●	●	461.3
31S,32S-150H/L	15A						●	755.1


H DENOTES FOR 250V (H表示 250V)
L DENOTES FOR 125V (L表示 125V)
● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:
INTERRUPTING RATING:
50 amperes at 125V AC (100mA-15A)
50 amperes at 250V AC (100mA-15A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME
100%	最快4小时 4 hours Min.
200%	1秒-60秒 1-60 seconds.

HOLLY FUSE 好利® 保险丝管

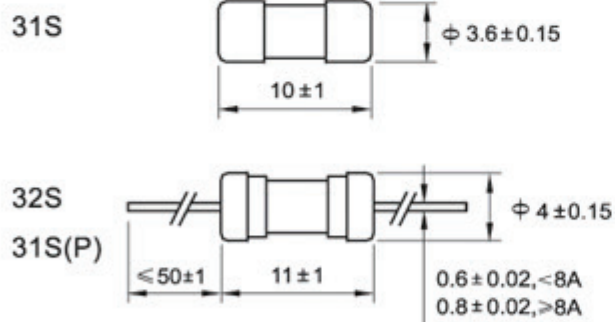

单位 Unit:mm

