



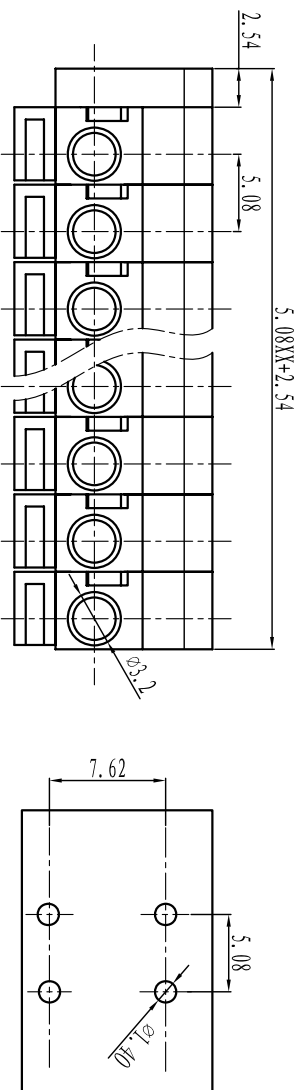

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

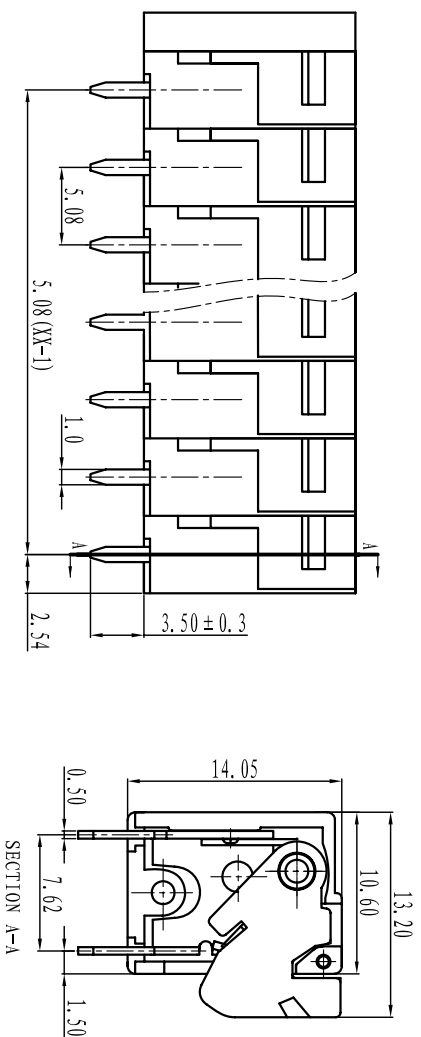

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 10A 15A
 使用线径/Wire range: 22-16AWG 1.5mm²
 耐压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V
 机械性能/Mechanical

温度范围/Temp.Range: -40° C~+105° C

瞬间温度/MAX Soldering: +250° C, for 5 Sec

剥线长度/Strip length: 10mm

尺寸/Dimensions

间距/Pitch: 5.08mm, 7.62mm

极数/Poles: 1P~XYP

材质及电镀/Material

塑件/Housing: PA66, UL94V-0


簧片/Wire guard: Stainless steel (SUS301)

焊脚/Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	□	∥	⊥
variable range	over 6 to 30	over 120 to 480	over 6 to 6	over 10 to 50	over 120 to 120	over 5 to 30	over 30 to 120	over 120 to 120
tolerance	±0.1 to ±0.2	±0.3 to ±0.5	±0.2 to ±0.5	±1° to 30°	10° to 20°	0.5 to 0.025	0.06 to 0.12	0.4

订购方式: HOW TO ORDER

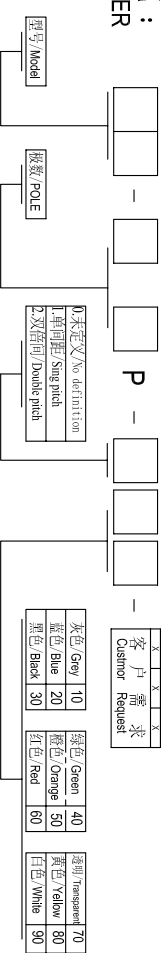

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE



第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME WJ142V-5.08-XP-1YY-00A