Schottky Barrier Diode

DB3S406F0L

Unit: mm

0.7

3. Cathode1

Anode2

DB3S406F0L

Panasonic

Silicon epitaxial planar type

For high speed switching circuits

■ Features

- · Small reverse current IR
- · Short reverse recovery time trr
- Halogen-free / RoHS compliant (EU RoHS / UL-94 V-0 / MSL:Level 1 compliant)
- Marking Symbol: 4V
- Basic Part Number : Dual DB2S406 (Series)
- Packaging

Revised

: 2013-12-13

Embossed type (Thermo-compression sealing): 3 000 pcs / reel (standard)

Panasonic SSMini3-F3-B
JEITA SC-89
Code SOT-490

0.26

(0.5)(0.5)

1.0


1. Anode1

2. Cathode2

■ Absolute Maximum Ratings Ta = 25 °C

Parameter		Symbol	Rating	Unit
Reverse voltage		VR	40	V
Repetitive peak reverse voltage		VRRM	40	V
Forward current	Singie	IF	100	mA
	Series	11	75	mA
Peak forward current	Singie	IFM	300	mA
reak lorward current	Series	IIIVI	225	mA
Non-repetitive peak	Singie	IFSM	1	Α
forward surge current *1	Series	IFSIVI	0.75	Α
Junction temperature		Tj	125	°C
Operating ambient temperature		Topr	-40 to +85	°C
Storage temperature	Tstg	-55 to +125	°C	
Note: *1 The peak to peak ve	luo in ono ovolo	of EO Uz oir	o wove (non rone	titivo)

Note: *1 The peak-to-peak value in one cycle of 50 Hz sine wave (non-repetitive)



Established: 2010-03-24

Schottky Barrier Diode

DB3S406F0L

Panasonic

■ Electrical Characteristics Ta = 25 °C ± 3 °C

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Forward voltage	VF	IF = 100 mA			0.6	V
Reverse current	IR	VR = 40 V			5	μΑ
Terminal capacitance	Ct	VR = 10 V, f = 1 MHz		2.2		pF
Reverse recovery time *1	l trr	IF = IR = 100 mA, Irr = 10 mA RL = 100 Ω		0.9		ns


Note: 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7031 Measuring methods for Diodes.

- 2. This product is sensitive to electric shock (static electricity, etc.). Due attention must be paid on the charge of a human body and the leakage of current from the operating equipment.
- 3. Absolute frequency of input and output is 250 MHz.
- 4. *1 trr test circuit

Established: 2010-03-24

Revised

: 2013-12-13

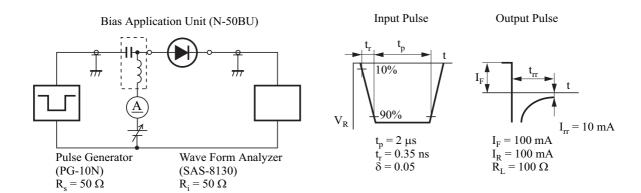


Panasonic


Revision. 2

Schottky Barrier Diode

DB3S406F0L

Technical Data (reference)

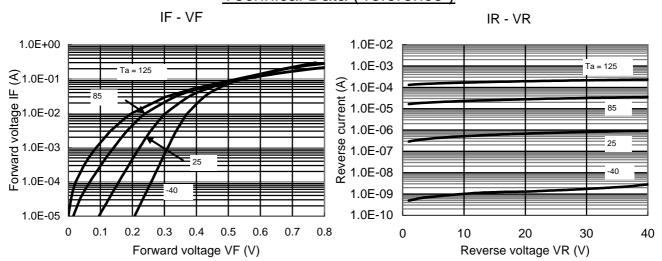




Established: 2010-03-24 Revised: 2013-12-13


Panasonic

SSMini3-F3-B

Unit: mm

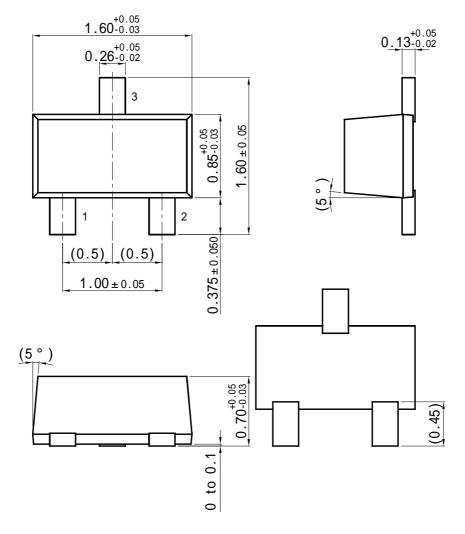

■ Land Pattern (Reference) (Unit: mm)



Established: 2010-03-24 Revised: 2013-12-13

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.

 Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

20100202

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: DB3S406F0L