

DB4X501K0R

Schottky Barrier Diode DB4X501K0R

Silicon epitaxial planar type

For high speed switching circuits DB2J501 in Mini4 type package


- Features
- · Short reverse recovery time trr
- Low terminal capacitance Ct
- Halogen-free / RoHS compliant (EU RoHS / UL-94 V-0 / MSL:Level 1 compliant)
- Marking Symbol: 4H
- Basic Part Number : Dual DB2J501 (Parallel)

Packaging

Embossed type (Thermo-compression sealing): 3 000 pcs / reel (standard)


■ Absolute Maximum Ratings Ta = 25 °C

Parameter		Symbol	Rating	Unit	
Reverse voltage		VR	50	V	
Repetitive peak reverse voltage		VRRM	50	V	
Non-repetitive peak	Single	IFSM	1	A	
forward surge current * ²	Double *1		0.75		
Peak forward current	Single	IFM	300	mA	
	Double *1		225		
Forward current (Average)	Single	IF(AV)	200	mA	
	Double *1	п (лу)	150		
Junction temperature		Tj	125	°C	
Operating ambient temperature		Topr	-40 to +85	°C	
Storage temperature		Tstg	-55 to +125	°C	



Note: *1 Value of each diode in series diodes used.

*2 50 Hz sine wave 1 cycle (Non-repetitive peak current)

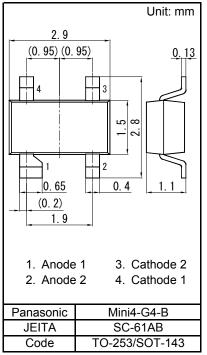

Panasonic

Schottky Barrier Diode DB4X501K0R

■ Electrical Characteristics Ta = 25 °C ± 3 °C


Parameter	Symbol	Conditions	Min	Тур	Max	Unit	
Forward voltage	VF1	IF = 30 mA			0.36	V	
	VF2	IF = 200 mA			0.55	v	
Reverse current	IR	VR = 50 V			200	μA	
Terminal capacitance	Ct	VR = 10 V, f = 1 MHz		4		pF	
Reverse recovery time ^{*1}	trr	IF = IR = 100 mA Irr = 10 mA, RL = 100 Ω		1.6		ns	

Note: 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7031 measuring methods for diodes.

2. This product is sensitive to electric shock (static electricity, etc.). Due attention must be paid on the charge of a human body and the leakage of current from the operating equipment.


3. Absolute frequency of input and output is 1 000 MHz.

4. *1 : trr measurement circuit

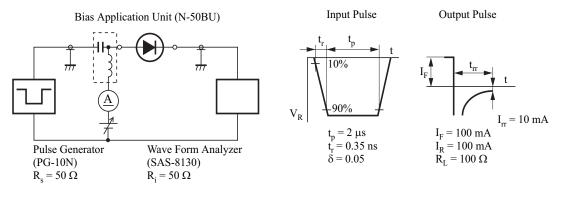


Panasonic

Schottky Barrier Diode DB4X501K0R

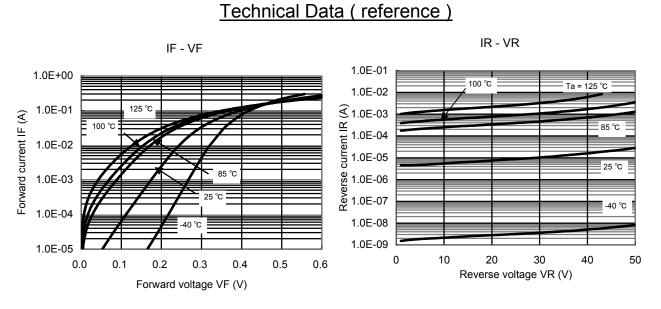



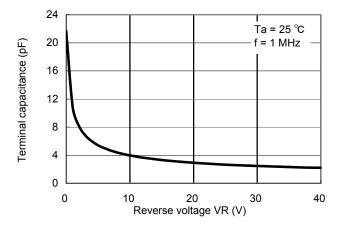

Established : 2010-02-22 Revised : 2013-12-13 Page 3 of 4


Doc No. TT4-EA-12390 Revision. 3





Schottky Barrier Diode DB4X501K0R

Unit: mm


Mini4-G4-B

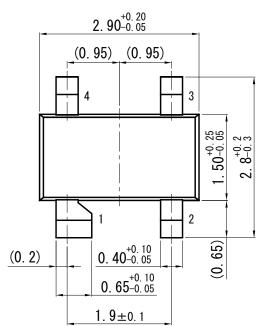

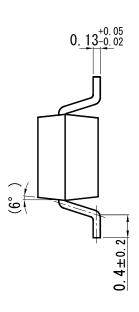

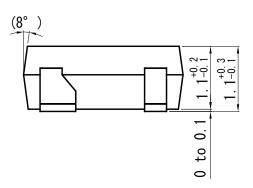

■ Land Pattern (Reference) (Unit: mm)

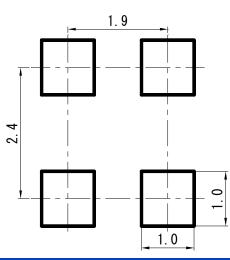

Established : 2010-02-22 Revised : 2013-12-13

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book. Consult our sales staff in advance for information on the following applications:

• Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.

It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.

- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.

Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.

(6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.

(7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

20100202

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: DB4X501K0R