

Zener Diode DZ2W27000L

Unit: mm

0.13

DZ2W27000L Silicon epitaxial planar type

For constant voltage / For surge absorption circuit DZ24270 in Mini2 type package

Features


- · Excellent rising characteristics of zener current Iz
- Low zener operating resistance Rz
- Halogen-free / RoHS compliant (EU RoHS / UL-94 V-0 / MSL:Level 1 compliant)
- Marking Symbol: FG

*2 t = 0.1ms

Packaging


Embossed type (Thermo-compression sealing): 3 000 pcs / reel (standard)

Absolute Maximum Ratings Ta = 25 °C							
Parameter	Symbol	Rating	Unit				
Repetitive peak forward current	IFRM	500	mA				
Forward current	IF	200	mA				
Total power dissipation ^{*1}	PT	1	W				
Non-repetitive reverse power surge *2	PZSM	100	W				
Electrostatic discharge *3	ESD	±30	kV				
Junction temperature	Tj	150	°C				
Operating ambient temperature	Topr	-40 to +85	°C				
Storage temperature	Tstg	-55 to +150	°C				
Note: *1 Mounted on ceramics print circuit board.							
Board size: 50 mm × 50 mm							
Board thickness: 0.8 mm							



1.6

2



*3 Test method:IEC61000_4_2(C = 150 pF,R = 330 Ω , Contact discharge:10 times)

■ Electrical Characteristics Ta = 25 °C ± 3 °C

Soldering size: 2 mm × 2 mm

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Forward voltage	VF	IF = 200 mA			1.2	V
Zener voltage *1, *2	VZ	IZ = 10 mA	25.65	27.00	28.35	V
Zener operating resistance	RZ	IZ = 10 mA			30	Ω
Reverse current	IR	VR = 19.0 V			10	μA
Temperature coefficient of zener voltage *3	SZ	IZ = 10 mA		27.0		mV/°C

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7031 Measuring methods for Diodes.

2. Absolute frequency of input and output is 5 MHz.

3. *1 The temperature must be controlled 25°C for VZ mesurement.

VZ value measured at other temperature must be adjusted to VZ (25°C)


*2 VZ guaranted 20 ms after current flow.

*3 Tj = 25°C to 150°C




Zener Diode DZ2W27000L

Technical Data (reference)

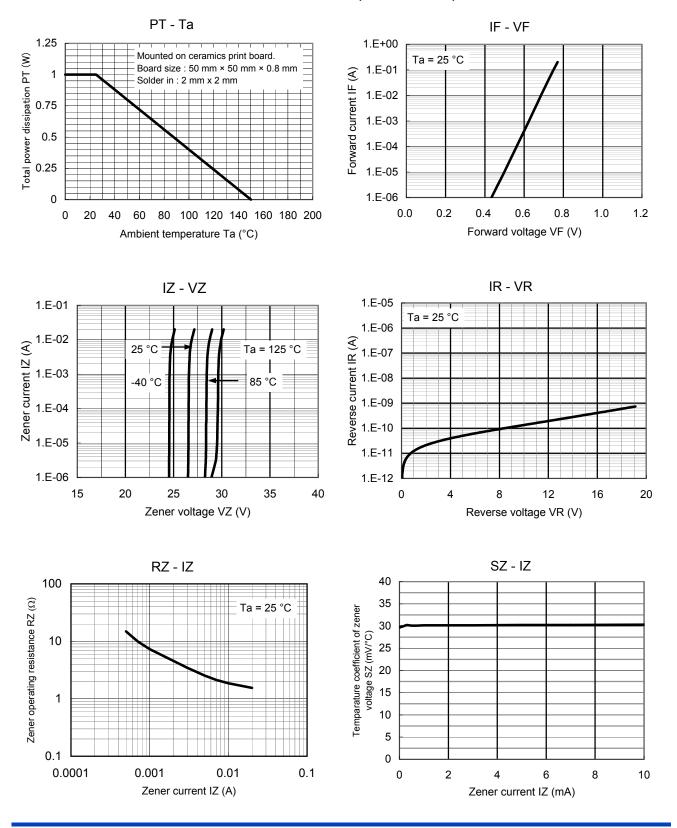



Page 2 of 4


Established : 2011-03-24 Revised : 2013-05-08

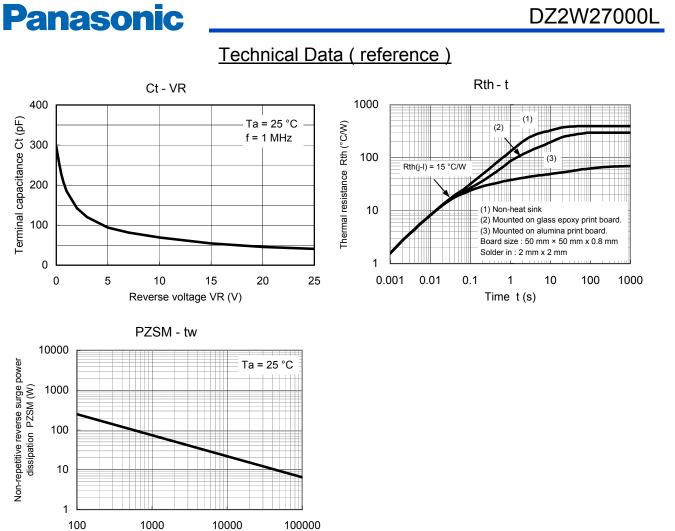

Pulse width tw (µs)

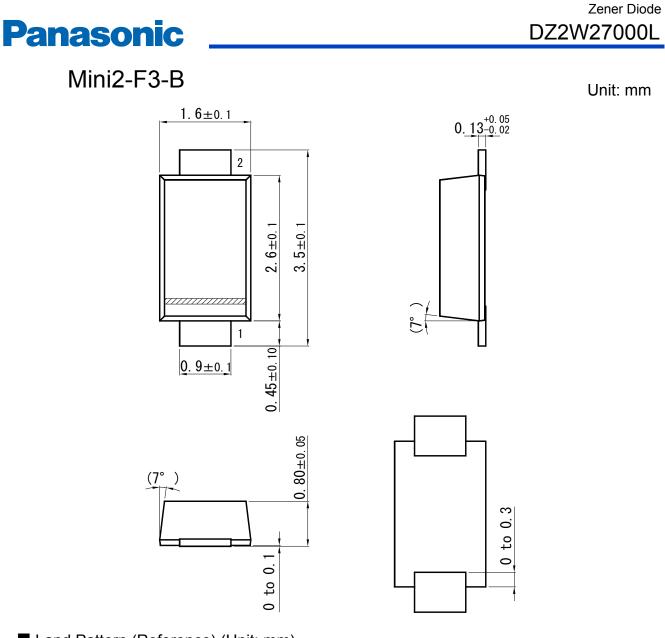





Established : 2011-03-24 Revised : 2013-05-08

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book. Consult our sales staff in advance for information on the following applications:

• Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.

It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.

- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.

Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.

(6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.

(7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

20100202

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: DZ2W27000L