MOS FET

SK8603180L

Panasonic

SK8603180L

Silicon N-channel MOSFET

For Load-switching / For DC-DC Converter

■ Features

- Low Drain-source On-state Resistance : RDS(on) typ = 6.7 m Ω (VGS = 4.5 V)
- Halogen-free / RoHS compliant (EU RoHS / UL-94 V-0 / MSL : Level 1 compliant)

■ Marking Symbol : 18

■ Packaging

Embossed type (Thermo-compression sealing): 3 000 pcs / reel (standard)

■ Absolute Maximum Ratings Ta = 25 °C

Parameter			Symbol	Rating	Unit		
Drain to Source Voltage			VDS	30	V		
Gate to Source Voltage			VGS	±20	V		
Drain Current	Ta = 25 °C, t = 10 s *1		ID	20			
	Ta = 25 °C, DC *1			15	٨		
	Tc = 25 °C			39	Α		
	Pulsed	l, Tch < 150 °C ^{*2}		60			
Total Power			PD	2.4	W		
Dissipation		Ta = 25 °C, DC *1 Tc = 25 °C	FD	19			
Thermal Resistance		Channel to Ambient	Rth(ch-a)	51	°C / W		
memai Resisi	ance	Channel to Case	Rth(ch-c)	6.6	-0/00		
Channel Temperature			Tch	150			
Operating ambient temperature			Topr	-40 to +85	°C		
Storage Temperature Range			Tstg	-55 to +150			
Avalanche Current (Single pulse) *3			IAR	10	Α		
Avalanche Energy (Single pulse) *3			EAR	12	mJ		


Note *1 Device mounted on a glass-epoxy board in Figure 1


Established: 2012-09-26

Revised

: 2013-05-31

- *2 Pulse test: Ensure that the channel temperature does not exceed 150 °C
- *3 VDD = 24 V, VGS = 10 to 0 V, L = 0.1 mH, Tch = 25 $^{\circ}$ C (initial)





- 2. Source 6. Drain
- 3. Source 7. Drain 4. Gate 8. Drain



Figure 1 FR4 Glass-Epoxy Board 25.4 mm × 25.4 mm × 0.8 mm

Panasonic

MOS FET

SK8603180L

■ Electrical Characteristics Ta = 25 °C ± 3 °C

Static Characteristics

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Drain-source Breakdown Voltage	VDSS	ID = 1 mA, VGS = 0 V	30			V
Zero Gate Voltage Drain Current	IDSS	VDS = 30 V, VGS = 0 V			10	μΑ
Gate-source Leakage Current	IGSS	VGS = ± 16 V, VDS = 0 V			±10	μΑ
Gate-source Threshold Voltage	Vth	ID = 1.45 mA, VDS = 10 V	1.3		3	V
Drain-source On-state Resistance		ID = 10 A, VGS = 10 V		5.1	7.1	mΩ
Diani-source On-sidle Nesistance	RDS(on)2	ID = 10 A, VGS = 4.5 V		6.7	9.8	

Dynamic Characteristics

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Input Capacitance	Ciss			1 200	1 680	
Output Capacitance	Coss	VDS = 10 V, VGS = 0 V		140	196	pF
Reverse Transfer Capacitance	Crss	f = 1 MHz		100	160	
Turn-on Delay Time *1	td(on)	VDD = 15 V, VGS = 0 to 10 V ID = 10 A		8		ns
Rise Time *1	tr			6		
Turn-off Delay Time *1	td(off)	VDD = 15 V, VGS = 10 to 0 V		39		no
Fall Time *1	tf	ID = 10 A		6		ns
Total Gate Charge	Qg	VDD = 15 V VCC = 0 to 4 5 V		9.2		
Gate to Source Charge	Qgs	VDD = 15 V, VGS = 0 to 4.5 V ID = 10 A		3		nC
Gate to Drain Charge	Qgd	ID - 10 A		3.5		
Gate resistance	rg	f = 5 MHz		1.4	3	Ω

Body Diode Characteristic

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Diode Forward Voltage	VSD	IS = 10 A, VGS = 0 V		0.8	1.2	V

Note: 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 Measuring methods for transistors.

Page 2 of 6


^{2. *1} Measurement circuit for Turn-on Delay Time / Rise Time / Turn-off Delay Time / Fall Time


MOS FET

SK8603180L

Panasonic

*1 Measurement circuit for Turn-on Delay Time / Rise Time / Turn-off Delay Time / Fall Time

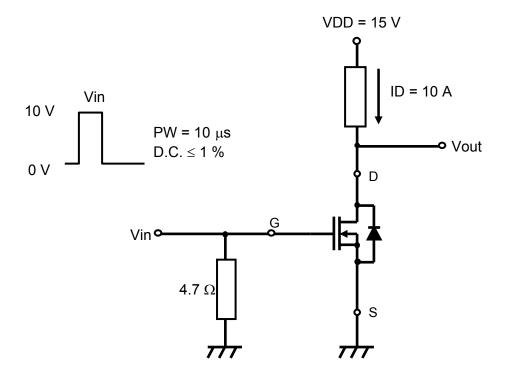


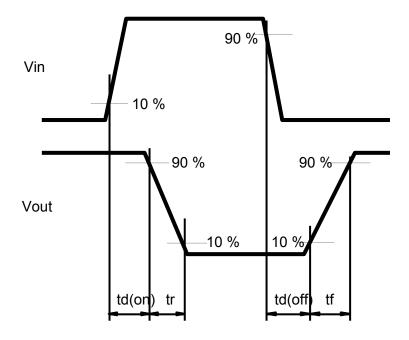



Panasonic


MOS FET **SK8603180L**


Technical Data (reference)















Panasonic

MOS FET

SK8603180L

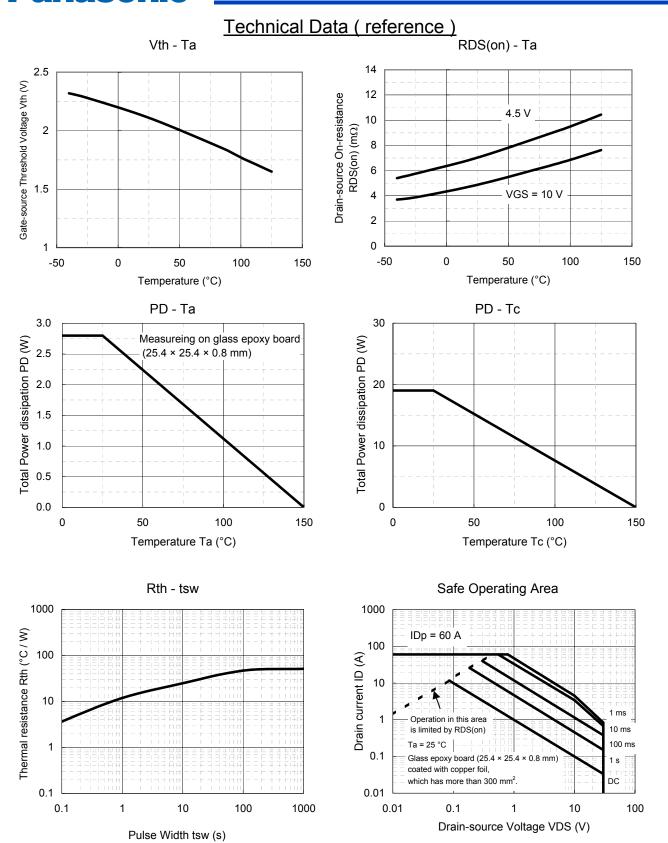


Page 5 of 6

MOS FET


SK8603180L

Panasonic

HSO8-F4-B

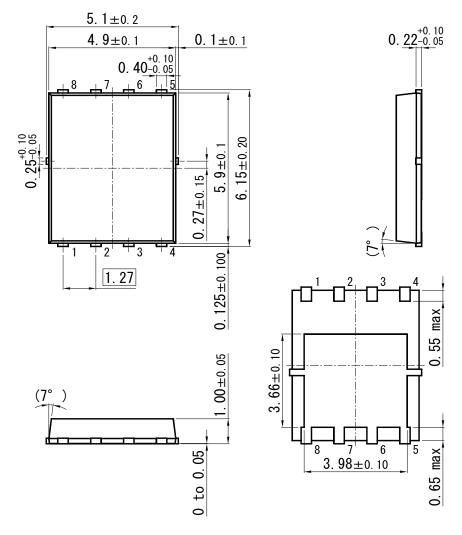

■ Land Pattern (Reference) (Unit : mm)

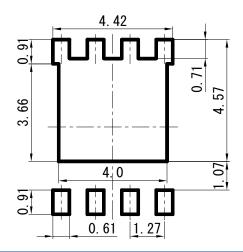

Page 6 of 6

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.

 Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

20100202

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: SK8603180L